



Fits Nissan (with factory 8 inch screen radio)

Kicks **2021-2024**

Versa **2023-2025**

Visit [MetraOnline.com](https://www.MetraOnline.com) for more detailed information about the product and up-to-date vehicle specific applications


KIT FEATURES

- ISO Double-DIN radio provision
- Painted scratch-resistant matte black
- Single-DIN provision with use of a pocket sold separately (88-00-9004)


KIT COMPONENTS

- A) Radio trim panel • B) Radio brackets • C) Phillips screws (4)

A



B



C



TABLE OF CONTENTS

Dash Disassembly	2-3
Kit Assembly	3

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: 70-7552

Antenna Adapter: 40-N13

Please visit [metraonline.com](https://www.metraonline.com) or [axxessinterfaces.com](https://www.axxessinterfaces.com) for more interface options.


TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver


Attention! With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections are secure before cycling the ignition to test this product.

DASH DISASSEMBLY

1. On the right of the steering column, unclip the driver's side panel just enough to free the dash panel for removal in the following steps. (Figure A)
2. Open the passenger door, then, using the panel removal tool, unclip and remove the panel on the side of the dash. Remove (1) Phillips screw exposed. (Figure B)




(Figure A)

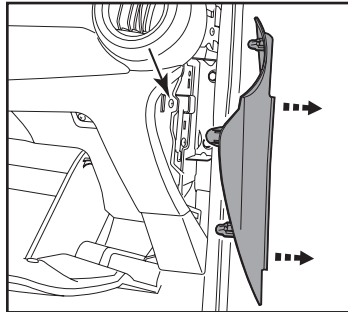


(Figure B)

3. Open glove box, remove (4) Phillips screws along the top and (2) along the bottom. Remove glove box and glove box trim all in one step. (Figure C, D)

Continued on the next page

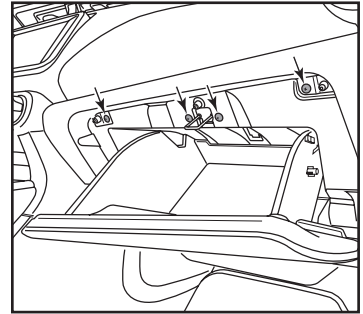

(Figure C)

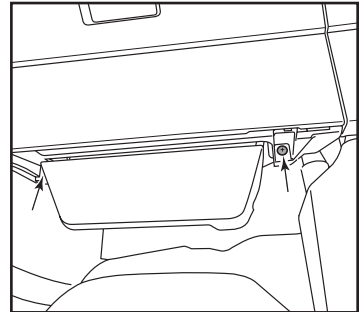


(Figure D)


DASH DISASSEMBLY (CONT.)

4. Remove (1) Phillips screw securing the passenger side A/C vent, then remove the vent. (Figure E)
5. Remove (1) Phillips screw securing the dash panel above the glovebox, then unclip and remove the panel. (Figure F)
6. Remove (4) Phillips screws securing the factory radio, disconnect the wiring, and then remove the radio. (Figure G)


Continue to Kit Assembly

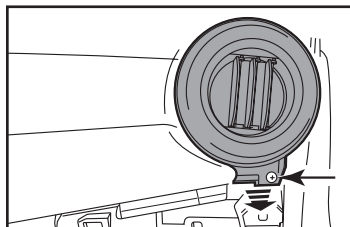

(Figure E)

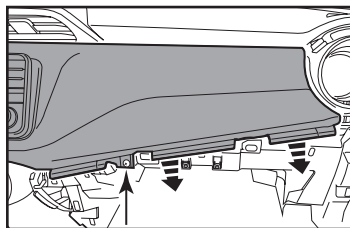


(Figure F)

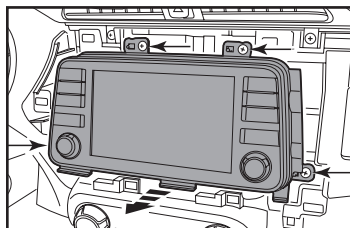


(Figure G)

KIT ASSEMBLY

1. Secure the **radio brackets** to the **radio trim panel** using the Phillips screws provided. (Figure A)
2. Secure the radio to the radio trim panel/ bracket assembly using the screws supplied with the radio. (Figure B)
3. Locate the factory wiring harness and antenna connector in the dash and complete all necessary connections to the radio. Metra recommends using the proper mating adapter from Metra and/or Axxess. Reconnect the negative battery terminal and test the aftermarket radio for proper operation.
4. Snap the radio trim panel assembly onto the dash and reassemble the dash in the reverse order of disassembly.

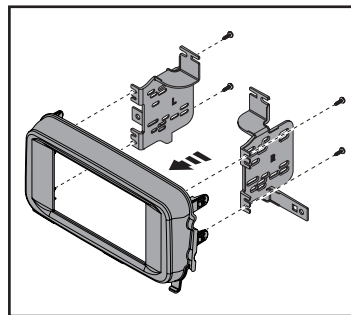

(Figure A)

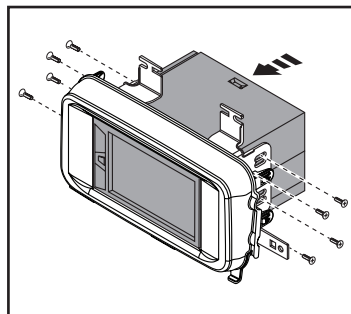

(Figure B)



95-7644B
INSTALLATION INSTRUCTIONS



Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP
certified technicians**