



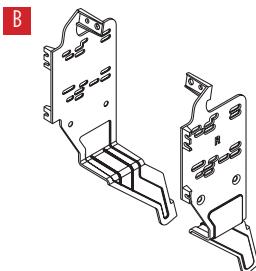

## KIT COMPONENTS

- A) Radio trim panel • B) Brackets • C) Phillips screws (4)

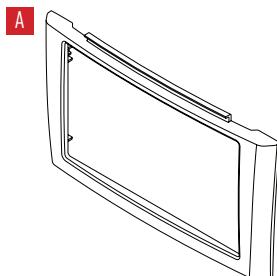

## Fits Nissan Maxima\* 2000-2003

\* Does not fit vehicles equipped with NAV or small radio with pocket combo.

Visit [MetraOnline.com](http://MetraOnline.com) for more detailed information about the product and up-to-date vehicle specific applications

## KIT FEATURES

- Stereo installation kit designed to fit any standard 4" tall (Double-DIN) aftermarket radio or ISO Single-DIN radio provision with pocket (88-00-9004 sold separately)
- Does not fit vehicles equipped with NAV or small radio with pocket combo.
- Painted scratch-resistant matte gray
- Made from the highest quality ABS plastic for an original factory-like fit and finish

## TABLE OF CONTENTS

Dash Disassembly.....	2
Kit Assembly .....	3

## WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: 70-7550

Antenna Adapter: 40-NI11


## TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver


**Attention!** with the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections are secure before cycling the ignition to test this product.

## DASH DISASSEMBLY

1. Unclip and remove the climate control vent panel. (Figure A)
2. Remove (2) Phillips screws exposed behind the vents. (Figure A)
3. Remove the ashtray and (1) Phillips screw exposed in the ashtray cavity. (Figure B)
4. Unclip and remove the gear shift trim panel. (Figure B)
5. Remove (2) Phillips screws exposed behind gear shift trim panel. (Figure B)
6. Unclip and remove the radio/climate control assembly.
7. Remove the climate control assembly from the factory brackets, set aside for Kit Assembly.

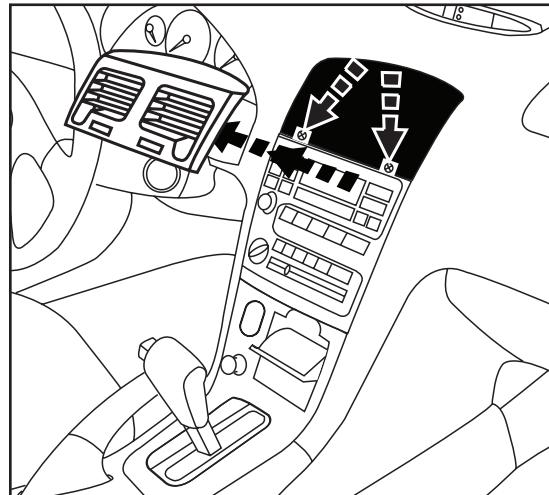

(Figure A)

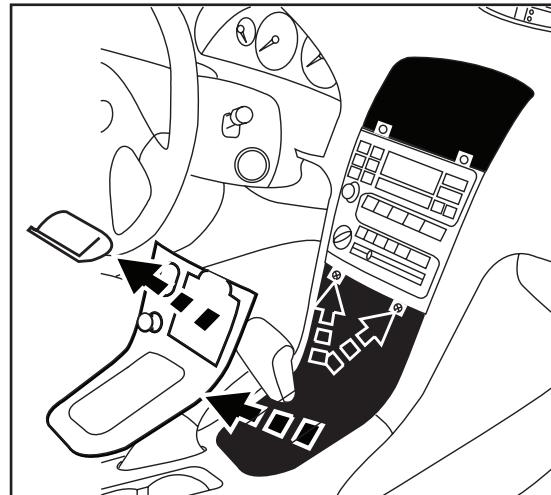


(Figure B)


Continue to Kit Assembly

## KIT ASSEMBLY

1. Attach the **radio brackets** to the **radio trim panel** using (4) #(8) x 3/8" Phillips screws supplied. (Figure A)
2. Slide the radio into the completed assembly, and then secure it to the assembly using screws supplied with the radio. (Figure B)
3. Slide the climate control into the radio/bracket assembly, and then secure it to the assembly using the factory screws. (Figures C, D)

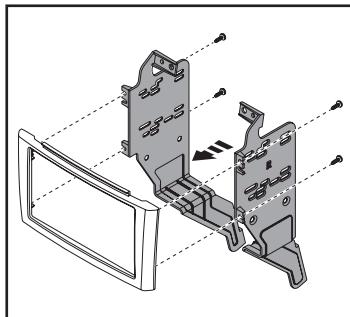


(Figure A)

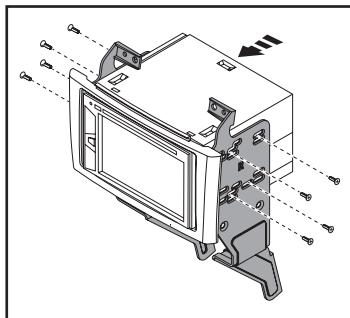


(Figure B)

4. Locate the factory wiring harness and antenna connector in the dash, and complete all necessary connections to the radio. Metra recommends using the proper mating adapter from Metra and/or AXXESS. Re-connect the negative battery terminal and test the radio for proper operation.
5. Reassemble the dash in reverse order of disassembly.

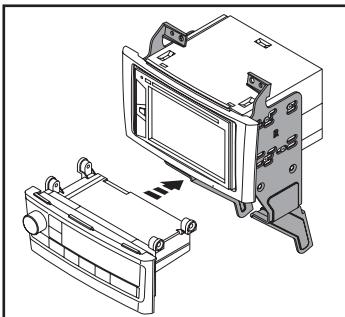

(Figure C)

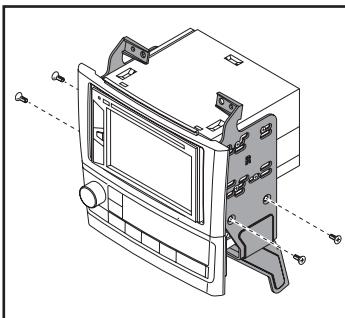

(Figure D)



**95-7645G**  
INSTALLATION INSTRUCTIONS



Having difficulties? We're here to help.



Contact our Tech Support line at:  
**386-257-1187**



Or via email at:  
[techsupport@metra-autosound.com](mailto:techsupport@metra-autosound.com)

**Tech Support Hours (Eastern Standard Time)**

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



Metra recommends **MECP**  
certified technicians