



Commercial Heavy Duty Camera Adjustable Dual View

Visit iBEAMUSA.com for more detailed information about the product and up-to-date vehicle specific applications.

Product Features

- Heavy duty metal housing
- 12 IR LEDs for night viewing - each camera
- Selectable parking lines
- PAL and NTSC selectable

Part Components

A) Camera B) 4-pin to RCA adapter and hardware

A



B



C) Extension (Sold separately)

C



TABLE OF CONTENTS

Camera.....	2
Wiring.....	3
Specifications.....	4

TOOLS REQUIRED

- Wire stripper
- Tape
- Digital Multi-meter

Attention! When testing the aftermarket equipment, ensure that all factory equipment is connected before cycling the key to ignition.

INSTALLATION

Camera install

1. There are two loops on the camera. If there is a not a need for parking lines, the loop will need to be cut. (Default lines on) If the video format needs to be changed, the loop will need to be cut. (Default NTSC)
 - Green - parking lines
 - White - PAL or NTSC format
2. Depending on your installation needs, the camera wire does have a grommet inline to use to help with sealing the entry place to the vehicle. iBEAM also suggest using some silicon to better help with water from entering the vehicle.
3. Once the wires are run, use the provided stainless steel screws to mount the camera. (Figure B) Once the camera is properly mounted use the screws on the side of the camera to position the cameras as needed. (Figure C)

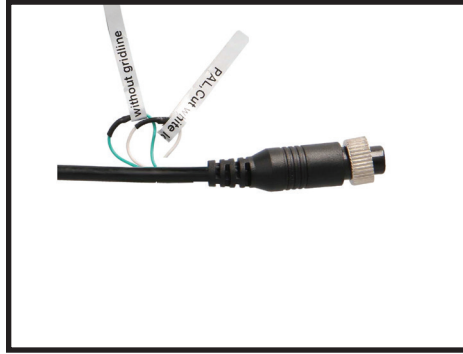


Figure A



Figure B



Figure C

WIRING

Wiring

Depending on the monitor that the camera will be connected to, there can be two different ways of wiring.

1. Figure A - Connecting to a 4-pin commercial monitor. Using the iBeam commercial camera extension (sold separately) part # TE-CEX10, TE-CEX20, TE-HEX10 or TE-HEX20 depending on your desired length.
2. Figure B - Connecting to a RCA connection style monitor. Using the supplied RCA to 4-pin adapter, connect the desired length of commercial camera extension listed above.
 - RED wire connect to 12V accessory or reverse trigger depending on your need for the camera.
 - Black wire connect to ground.

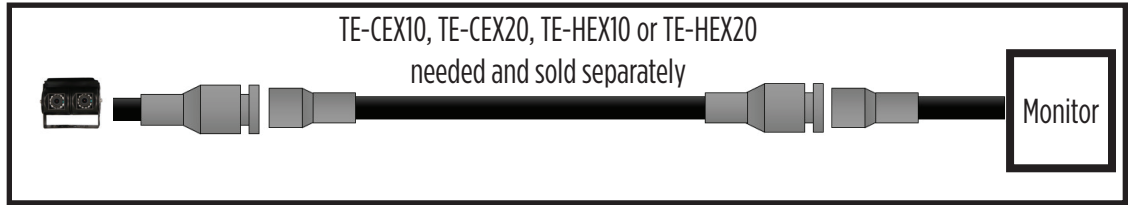


Figure A

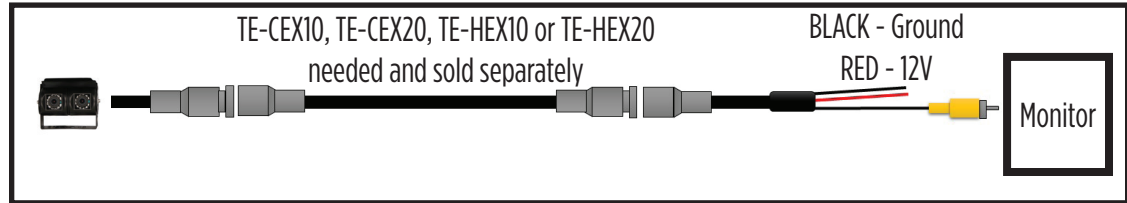


Figure B

NOTE: For the TE-CCDL1 will need two extensions, one for each camera.



Resolution	600 TV lines
Field of view	Diagonal 120°
TV System	NTSC or PAL - white loop
Min. Illumination	0.01 Lux
Working Voltage	12 V
Storage Temp.	-20° ~ 75 °C
Working Temp.	-30° ~ 85 ° C
IP rating	IP68

Having difficulties? We're here to help.



Contact our Tech Support line at:
386-257-1187



Or via email at:
techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 7:00 PM

Sunday: 10:00 AM - 4:00 PM



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra Recommends MECP
certified technicians**