




TE-TSI4 Installation

The TE-TSI4 is a 4-channel camera switching interface. This system will allow 4 cameras to be viewed on one screen and be triggered by either a positive trigger or the provided switch.

WIRING

- **Black - Ground**
- **Green - Accessory power**
- **Blue - Rear camera positive trigger**
- **Yellow - Left camera positive trigger**
- **White - Right camera positive trigger**
- **Red on male RCA - 12V positive trigger for monitor (if needed)**
- **Red and black on the female RCA - power and ground for cameras, will power on with the trigger or on the switch press.**

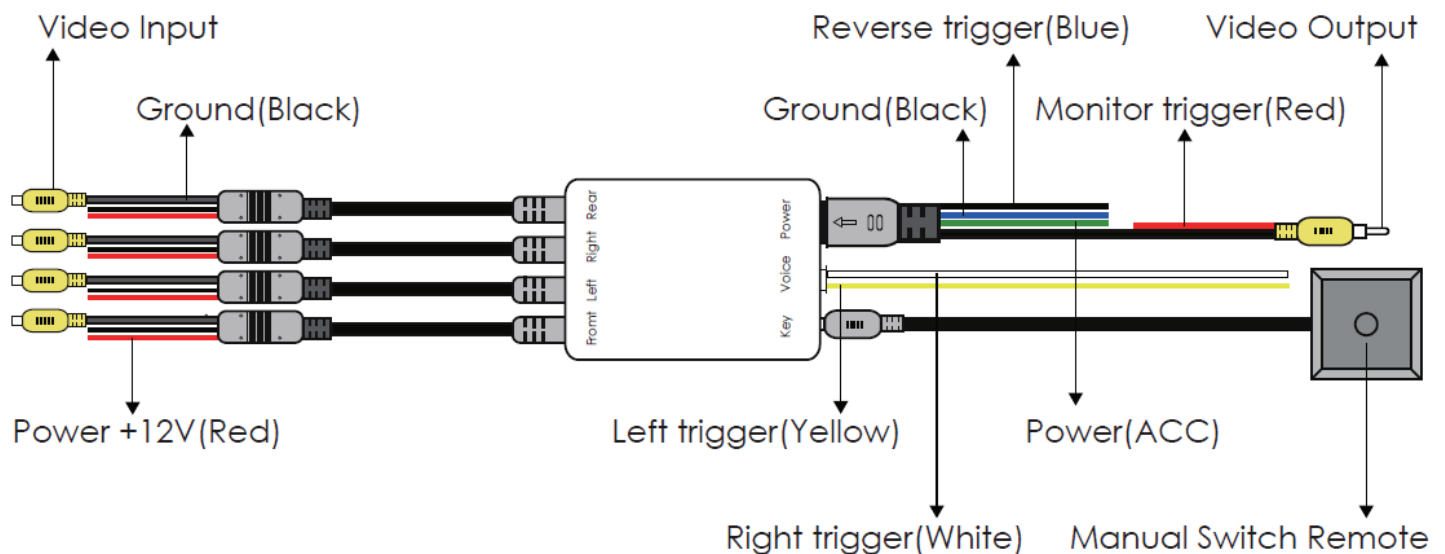

Switch Operation

Auto Mode:


- Triggers will operate as they should.
- To view the front camera, the switch must be used.

Manual Mode:

- To activate press the switch for the desired camera.
- Switch will be used to active each camera.
- One press will turn the camera on, one press will turn the camera off. (Left and right have a 5 sec. turn-off delay)
- MODE will cancel the manual mode.

NOTE : Front camera will be shown when rear trigger is off for 10 sec. This is normal operation.

© Copyright 2021 Metra Electronics

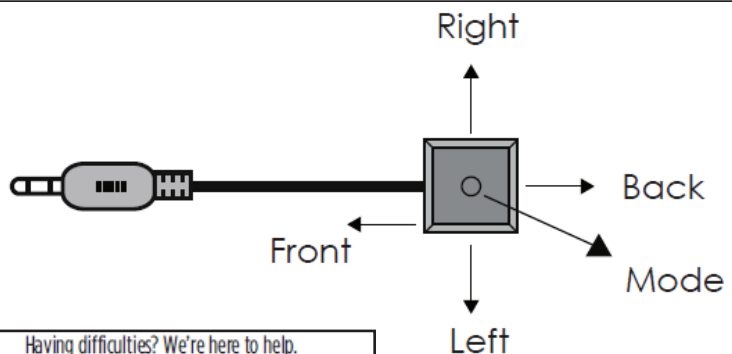

Having difficulties? We're here to help.

Contact our Tech Support line at:
386-257-1187

Or via email at:
techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM
 Saturday: 10:00 AM - 7:00 PM
 Sunday: 10:00 AM - 4:00 PM