



AXDI-A12

INSTALLATION INSTRUCTIONS



Data Interface

Fits Select Audi Models 2002-2013

FEATURES

- Designed for non-amplified and amplified systems
- Provides accessory power (12-volt 10-amp)
- Retains R.A.P. (Retained Accessory Power)
- Provides NAV outputs (parking brake, reverse, speed sense)
- Pre-wired for Axxess SWC interface (sold separately)
- Retains factory chimes
- Retains balance & fade
- Micro "B" USB updatable

COMPONENTS

- AXDI-A12 interface
- LD-AX-XSVI-AU1 harness
- LD-AX-XSVI-AU2 harness

APPLICATIONS

Audi

LD-AX-XSVI-AU1 Harness:

A4/RS 4/S4 (with NAV)	2005-2008
A4/RS 4/S4 (1)	2007-2008
A4/RS 4/S4 (1)	2006
TT	2008-2013

LD-AX-XSVI-AU2 Harness:

A3 (2)	2006-2007
A4/S4 (3)	2002-2006
A6	2004
Allroad	2004-2005
TT	2002-2013

- (1) With either Symphony Plus or NAV radio.
- (2) With Concert radio (without NAV)
- (3) With Symphony radio (without NAV)

TABLE OF CONTENTS

Connections.....	2-3
LD-AX-XSVI-AU1 Diagram.....	2
LD-AX-XSVI-AU2 Diagram.....	3
Installation	4
Programming.....	4

TOOLS & INSTALLATION ACCESSORIES REQUIRED


- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip-ties

Visit AxxessInterfaces.com


for more detailed information about the product and up-to-date vehicle specific applications

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product. **NOTE:** Refer also to the instructions included with the aftermarket accessory before installing this device.

CONNECTIONS: LD-AX-XSVI-AU1 DIAGRAM

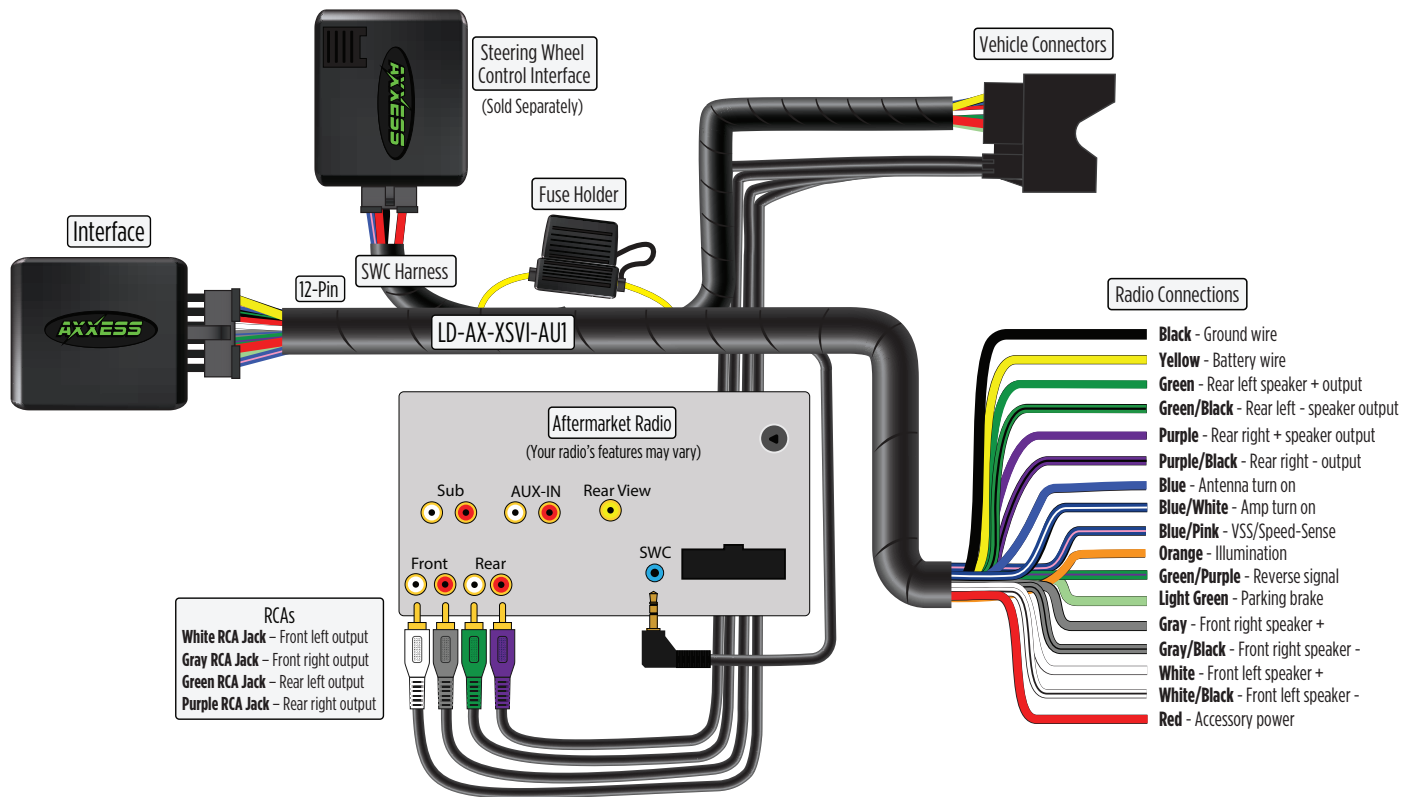

CONNECTIONS: LD-AX-XSVI-AU2 DIAGRAM

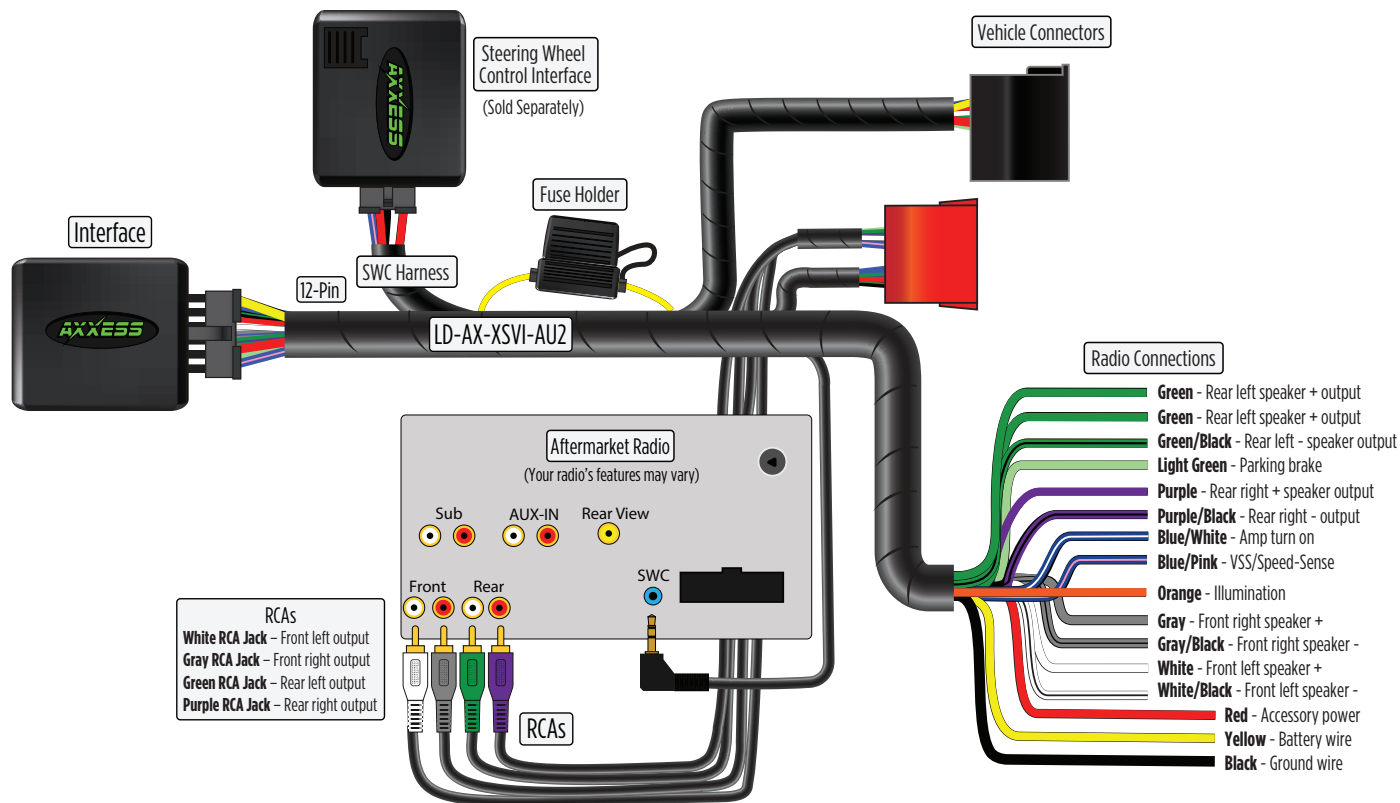



AXDI-A12

INSTALLATION INSTRUCTIONS

INSTALLATION

With the key in the off position:

- Connect the **LD-AX-XSVI-AU1** or **LD-AX-XSVI-AU2** harness into the interface, and then to the wiring harness in the vehicle.

PROGRAMMING

Attention! If the interface loses power for any reason, the following steps will need to be performed again. Also, if installing an Axxess SWC interface, connect it after you initialize and test the interface/radio, with the key in the off position.

- Turn the key (or push-to-start button) to the ignition position and wait until the radio comes on.

Note: If the radio does not come on within 60 seconds, turn the key to the off position, disconnect the interface, check all connections, reconnect the interface, and then try again.

- Turn the key to the off position, and then to the accessory position. Test all functions of the installation for proper operation, before reassembling the dash.

Note: If using the Axxess SWC interface, connect it after you initialize the AXDI-A12, with the key in the off position.

Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP
certified technicians**