



AXDI-GM5

INSTALLATION INSTRUCTIONS



Data Interface

Fits Chevrolet Equinox 2005-2006

INTERFACE FEATURES

- Designed for non-amplified systems or bypassing a factory amplifier
- Provides accessory power (12-volt 10-amp)
- Retains R.A.P. (Retained Accessory Power)
- Provides NAV outputs (parking brake, reverse, speed sense)
- NOT pre-wired for Axxess SWC interface
- Designed for vehicles without, or not retaining, OnStar®
- Retains factory chimes
- Retains all warning chimes through onboard speaker
- Retains balance & fade
- High-level speaker input
- Micro “B” USB updatable

www.MetraOnline.com

MetraOnline.com may be used to assist with dash assembly instructions. Simply enter your Year, Make, Model vehicle into the vehicle fit guide and look for the Dash Kit Installation Instructions.



INTERFACE COMPONENTS

- AXDI-GM5 interface
- LD-LCGM-05 harness

TABLE OF CONTENTS

Connections	
LD-LCGM-05 DIAGRAM.....	2
Installation	3
Programming.....	3

TOOLS & INSTALLATION ACCESSORIES REQUIRED


- Cutting tool • Tape • Crimping tool
- Connectors (i.e. butt-connectors, bell caps, etc.)

Visit AxxessInterfaces.com

for more detailed information about the product and up-to-date vehicle specific applications

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product. **NOTE:** Refer also to the instructions included with the aftermarket accessory before installing this device.

CONNECTIONS: LD-AXDI-GM5 DIAGRAM

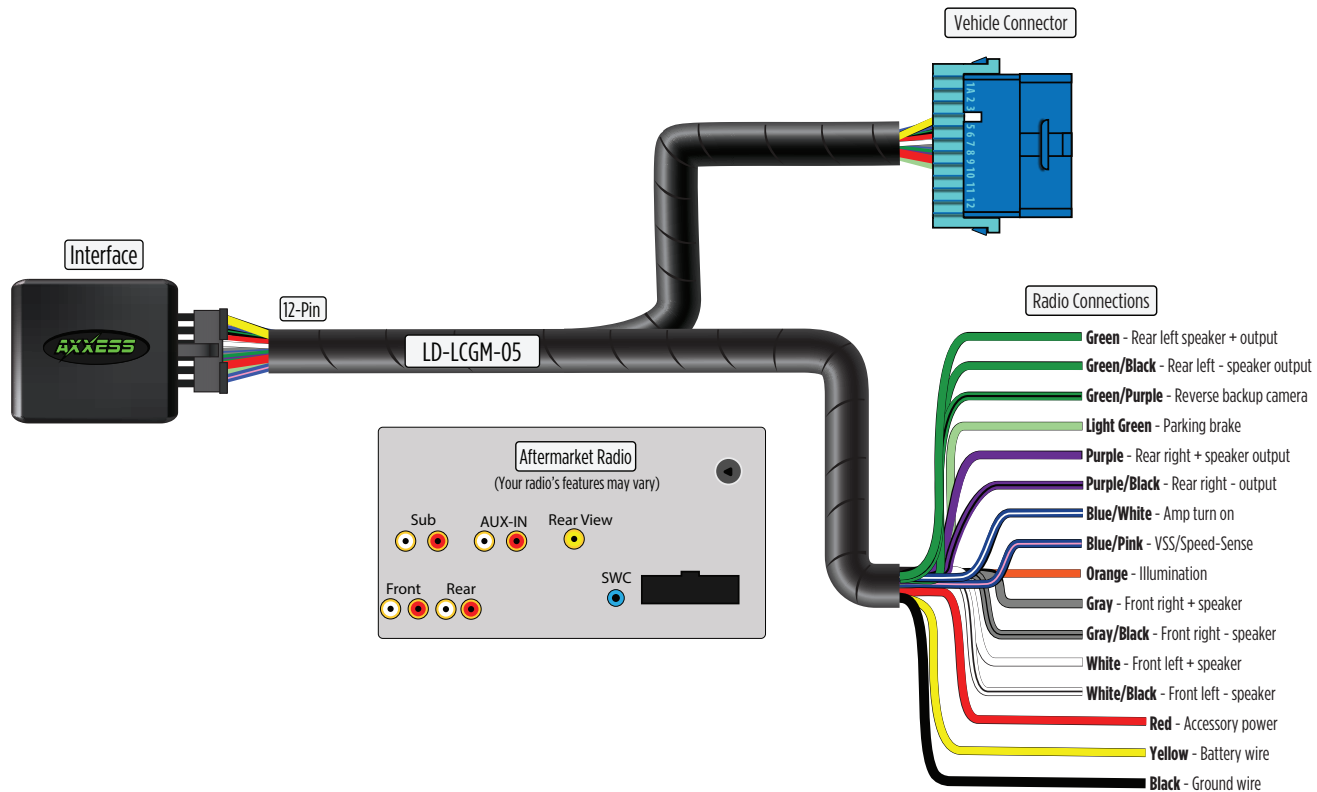

INSTALLATION

With the key in the off position:

- Connect the **LD-LCGM-05** harness into the interface, and then to the wiring harness in the vehicle.

PROGRAMMING

Attention! If the interface loses power for any reason, the following steps will need to be performed again. If installing an Axxess SWC interface, connect it after you initialize and test the interface/radio, with the key in the off position.

- Turn the key (or push-to-start button) to the ignition position and wait until the radio comes on.

Note: If the radio does not come on within 60 seconds, turn the key to the off position, disconnect the interface, check all connections, reconnect the interface, and then try again.

- Turn the key to the off position, and then to the accessory position. Test all functions of the installation for proper operation, before reassembling the dash.



AXDI-GM5

INSTALLATION INSTRUCTIONS

Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP
certified technicians**