



## Data Interface

### Fits Chevrolet Corvette 1997-2004

#### INTERFACE FEATURES

- Provides accessory power (12-volt 10-amp)
- Retains R.A.P. (Retained Accessory Power)
- Retains amplified door woofers
- High-level speaker input
- Micro "B" USB updatable

#### INTERFACE COMPONENTS

- AXDI-VET1 interface
- LD-AX-XSVI-GM5 harness
- Differential Converter

#### APPLICATIONS

**Chevrolet**  
Corvette ..... 1997-2004

#### TABLE OF CONTENTS

Connections	
LD-AX-XSVI-GM5 Diagram.....	2
Installation .....	3
Programming.....	3


#### TOOLS & INSTALLATION ACCESSORIES REQUIRED

- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip-ties

Visit [AxxessInterfaces.com](http://AxxessInterfaces.com)  
for more detailed information about the product  
and up-to-date vehicle specific applications

**ATTENTION:** With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product. **NOTE:** Refer also to the instructions included with the aftermarket accessory before installing this device.

## CONNECTIONS: LD-AX-XSVI-GM5 DIAGRAM

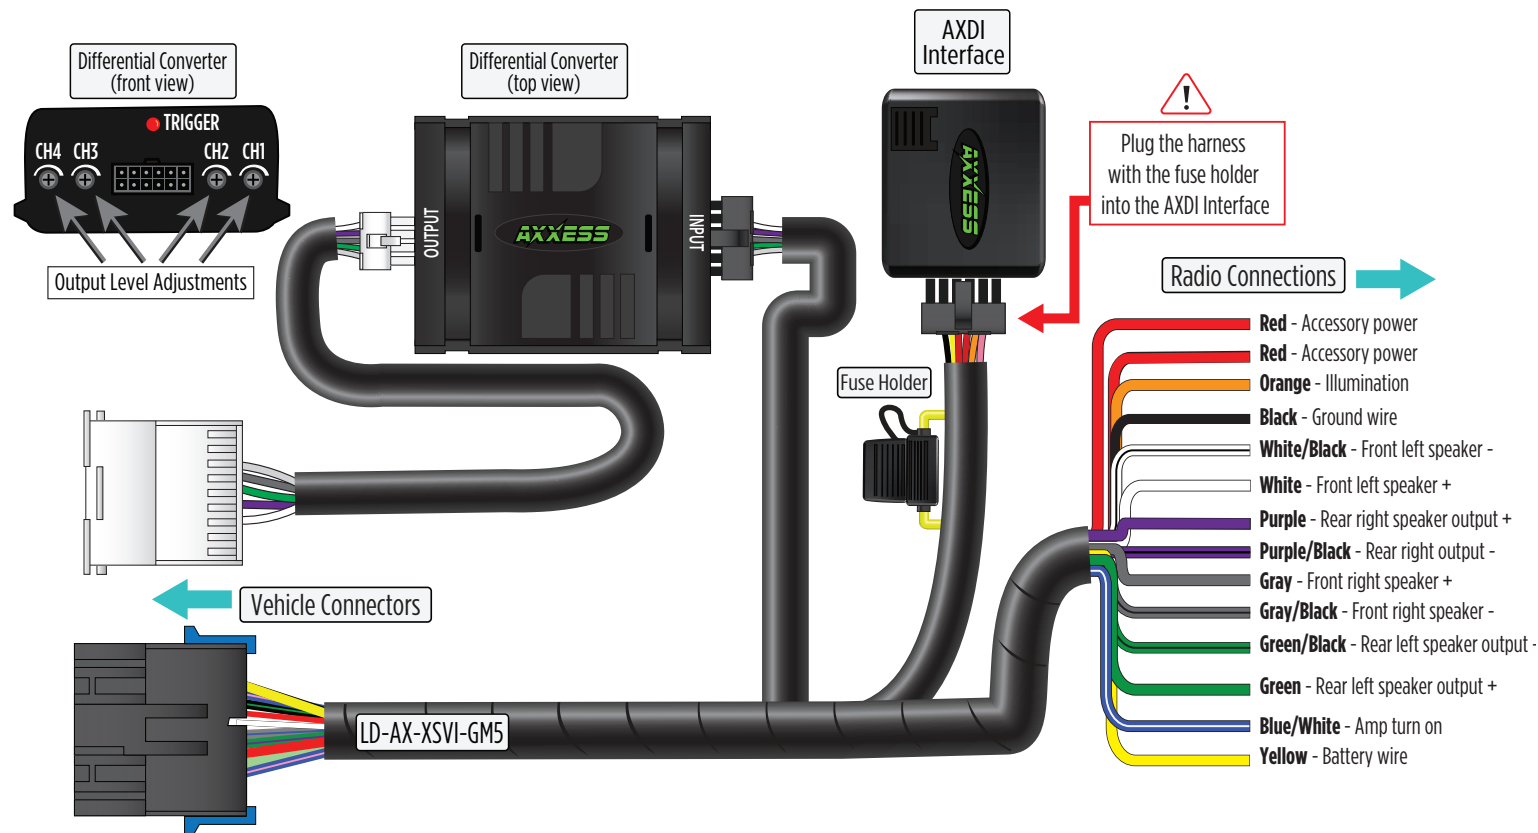

## INSTALLATION

### With the key in the off position:

- Connect the **LD-AX-XSVI-6M5** harness into the interface, and then to the wiring harness in the vehicle.

## PROGRAMMING

**Attention!** If the interface loses power for any reason, the following steps will need to be performed again.

- Turn the key (or push-to-start button) to the ignition position and wait until the radio comes on.

**Note:** If the radio does not come on within 60 seconds, turn the key to the off position, disconnect the interface, check all connections, reconnect the interface, and then try again.

- Turn the key to the off position, and then to the accessory position. Test all functions of the installation for proper operation, before reassembling the dash.



# AXDI-VET1

INSTALLATION INSTRUCTIONS

Having difficulties? We're here to help.



Contact our Tech Support line at:

**386-257-1187**



Or via email at:

[techsupport@metra-autosound.com](mailto:techsupport@metra-autosound.com)

## **Tech Support Hours (Eastern Standard Time)**

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP  
certified technicians**