

## Stop/Start Override Interface

Fits Select GM Models **2016-2025**

### INTERFACE FEATURES

- Allows the override of the STOP/START engine feature
- Can be used with either a factory or aftermarket radio
- Simple 2-wire setup
- Retains remote start feature, if equipped

### Product Info



### APPLICATIONS

#### LD-GM1-SSO applications

##### Buick

Enclave ..... 2018  
Encore ..... 2016-2018  
Envision ..... 2016-2019  
LaCrosse ..... 2017-2019  
Regal ..... 2017-2018

##### Cadillac

CTS ..... 2019  
XT5 ..... 2017-2018

##### Chevrolet

Cruze ..... 2017-2018  
Equinox ..... 2018-2019  
Malibu ..... 2016-2017  
Traverse ..... 2018  
Trax ..... 2016-2018

##### GM

Acadia ..... 2017-2018  
Terrain ..... 2018-2019  
Yukon ..... 2018

#### LD-GM2-SSO applications

##### Buick

Enclave ..... 2019-2025  
Encore ..... 2019-2025  
Regal ..... 2019-2020

##### Cadillac

CT6 ..... 2019-2020  
Escalade ..... 2019-2025  
XT4 ..... 2019-2024  
XT5 ..... 2019-2024  
XTS ..... 2019

##### Chevrolet

Blazer ..... 2021-2025  
Colorado ..... 2019-2025  
Cruze ..... 2019  
Equinox ..... 2018-2025  
Malibu ..... 2018-2025  
Silverado ..... 2019-2025  
Suburban ..... 2019-2025  
Tahoe ..... 2019-2025

##### Chevrolet cont

Trailblazer ..... 2021-2025  
Traverse ..... 2019-Up  
Trax ..... 2019-2025

##### GMC

Acadia ..... 2019-2025  
Canyon ..... 2019-2025  
Sierra ..... 2019-2025  
Terrain ..... 2018-2025  
Yukon ..... 2018-2025

### TABLE OF CONTENTS

Installation ..... 2

### INTERFACE COMPONENTS

- AXSSO-GM2 interface
- LD-GM1-SSO harness
- LD-GM2-SSO harness

### TOOLS & INSTALLATION ACCESSORIES REQUIRED


- Zip ties
- Zip tie cutter
- GM battery terminal wrench

### INTRODUCTION

The AXSSO-GM2 is designed to disengage the STOP/START feature of the vehicle, and keep that feature disengaged even after the key has been cycled. Simple 2-wire installation (ground and power to the battery) is all that is required to install the interface in the vehicle. No programming required!

**ATTENTION:** With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.  
**NOTE:** Refer also to the instructions included with the aftermarket radio.

## INSTALLATION

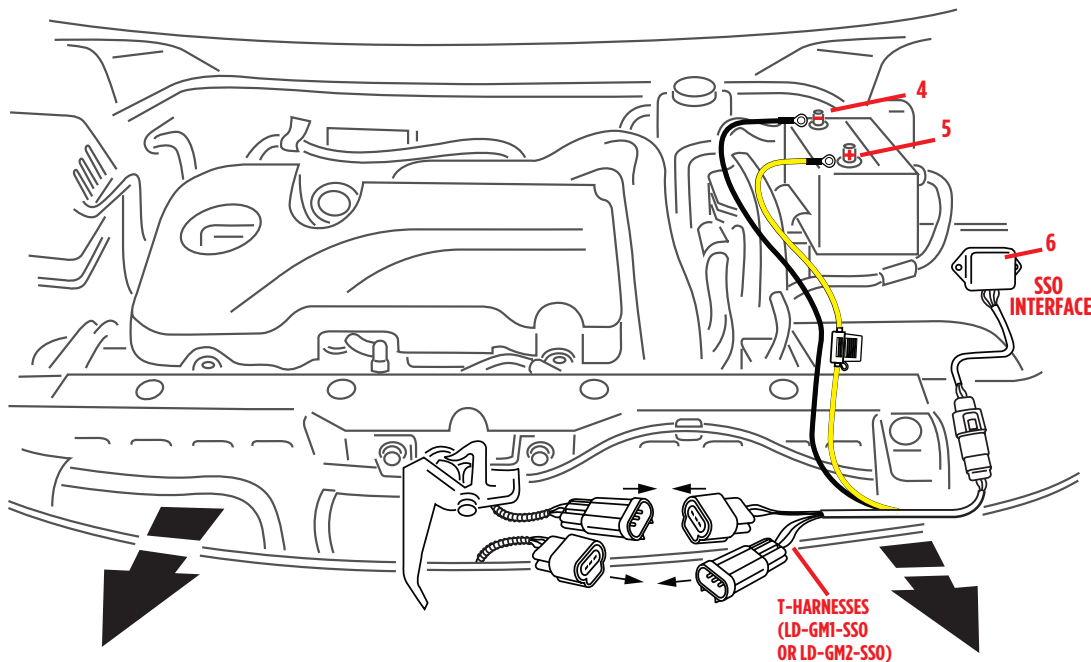

(Figure shown for illustration purposes only. Actual vehicle and installation locations will differ)

1. Open the hood and locate the hood pin switch harness underneath the hood latch.
2. Unplug the hood pin switch harness, then plug in the appropriate harness.
3. Route the power and ground wires to the vehicles battery.
4. Connect the **Black** wire to the negative terminal.
5. Connect **Yellow** wire to the positive terminal.
6. Find a safe and secure spot for the water resistant **AXSSO-GM2 interface**, away from any heat sources and moving parts. With the wiring harness facing downward, zip tie the interface securely.
7. The installation is now complete.

**Note:** There are 2 T-harnesses to choose from.

**Tech Tip!** After install, if the check engine light appears, remove ground connection that was made to the battery and splice into the **Brown** wire on the vehicle side of the T-harness.

[illegible]



## AXSSO-GM2

INSTALLATION INSTRUCTIONS

Having difficulties? We're here to help.



Contact our Tech Support line at:

**386-257-1187**



Or via email at:

[techsupport@metra-autosound.com](mailto:techsupport@metra-autosound.com)

### Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP  
certified technicians**