

## Honda SWC (Steering Wheel Control) and Data Interface 2016-2018

### INTERFACE FEATURES

- Provides illumination, parking brake, reverse, and speed sense outputs
- Retains the factory backup camera, and also includes an 12-volt to 6-volt step-down converter
- Retains audio controls on the steering wheel
- Designed to be compatible with all major radio brands
- Auto detects vehicle type, radio connection, and preset controls
- Ability to dual assign steering wheel control buttons
- Retains memory settings even after battery disconnection or interface removal (non volatile memory)
- Micro-B USB updatable

### APPLICATIONS

#### Honda

Civic (Coupe, Sedan) LX, LX-P	2016-2018
Civic (Hatchback) LX, Sport	2017-2018

### TABLE OF CONTENTS

Connections .....	2
Programming .....	3
Troubleshooting .....	4

### INTERFACE COMPONENTS

- AXTC-HN1 interface
- AXTC-HN1 harness
- 3.5mm adapter


### TOOLS & INSTALLATION ACCESSORIES REQUIRED

- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip ties

### Product Info




# CONNECTIONS

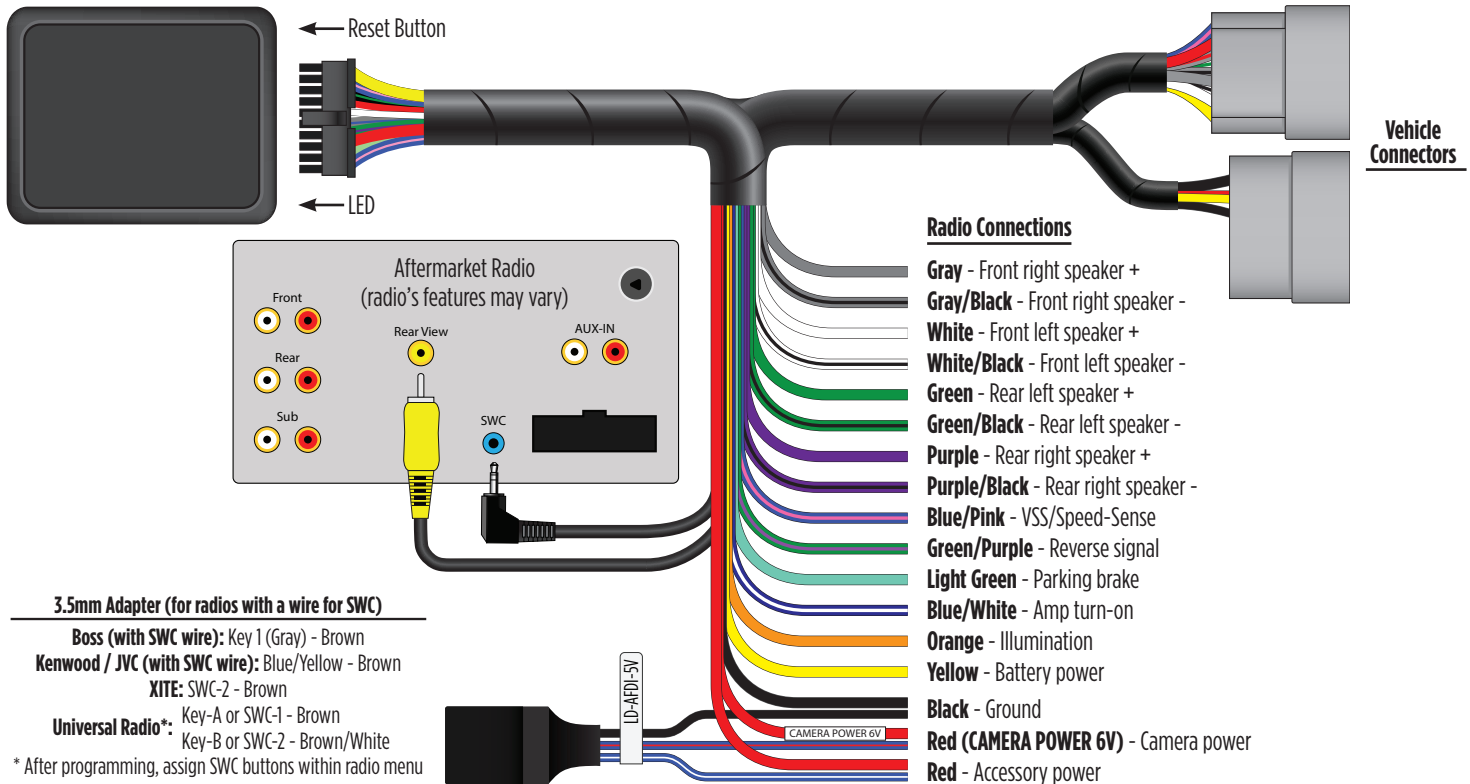


# PROGRAMMING


1.  Open the driver's door, and keep open during the programming process.


2.  Cycle the ignition on.

3.  Connect the **AXTC-HN1 harness** to the **AXTC-HN1 interface**, and then to the wiring harness in the vehicle.

4.  Tap **Volume Up**. Locate the **Volume Up** button on the the steering wheel. Program the interface by tapping the **Volume Up** button until the LED stops flashing.

5.  The LED will flash **Green & Red** while the interface programs the radio to the steering wheel controls. Once programmed, the LED will go out, then produce a pattern which will identify the radio type installed. Refer to the **Radio LED Feedback** section under **Troubleshooting** for radio types.




6.  The LED will go out, then once again quickly flash **Green & Red** while the interface programs itself to the vehicle. Once programmed, the LED will go out again, then turn solid **Green**.

7.  Cycle the ignition off, then back on.

8.  Test all functions of the installation for proper operation.

## TROUBLESHOOTING

1. If the interface fails to function, press and release the reset button, then repeat the programming process from step 4 to try again.



2. **Final LED Feedback**

At the end of programming the LED will turn **Solid Green** which indicates programming was successful. If the LED didn't turn **Solid Green**, reference the list below to understand which programming section the problem may stem from.

LED Light	Radio Programming Section	Vehicle Programming Section
Solid Green	Pass	Pass
Slow Red Flash	Fail	Pass
Slow Green Flash	Pass	Fail
Solid Red	Fail	Fail

**Note:** If the LED shows **Solid Green** for **Pass** (indicating everything programmed correctly), yet the steering wheel controls don't work, make sure that the 3.5mm jack is plugged in, and plugged into the correct jack in the radio. Once corrected, press the reset button, then program again.

Having difficulties? We're here to help.



Contact our Tech Support line at:  
**386-257-1187**



Or via email at:  
techsupport@metra-autosound.com

### Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 7:00 PM

Sunday: 10:00 AM - 4:00 PM

QR Code Scan Here



Further troubleshooting steps and information can be located at:

[axxessinterfaces.com/product/AXTC-HN1](http://axxessinterfaces.com/product/AXTC-HN1)



**KNOWLEDGE IS POWER**

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto [www.installerinstitute.com](http://www.installerinstitute.com) or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP certified technicians**