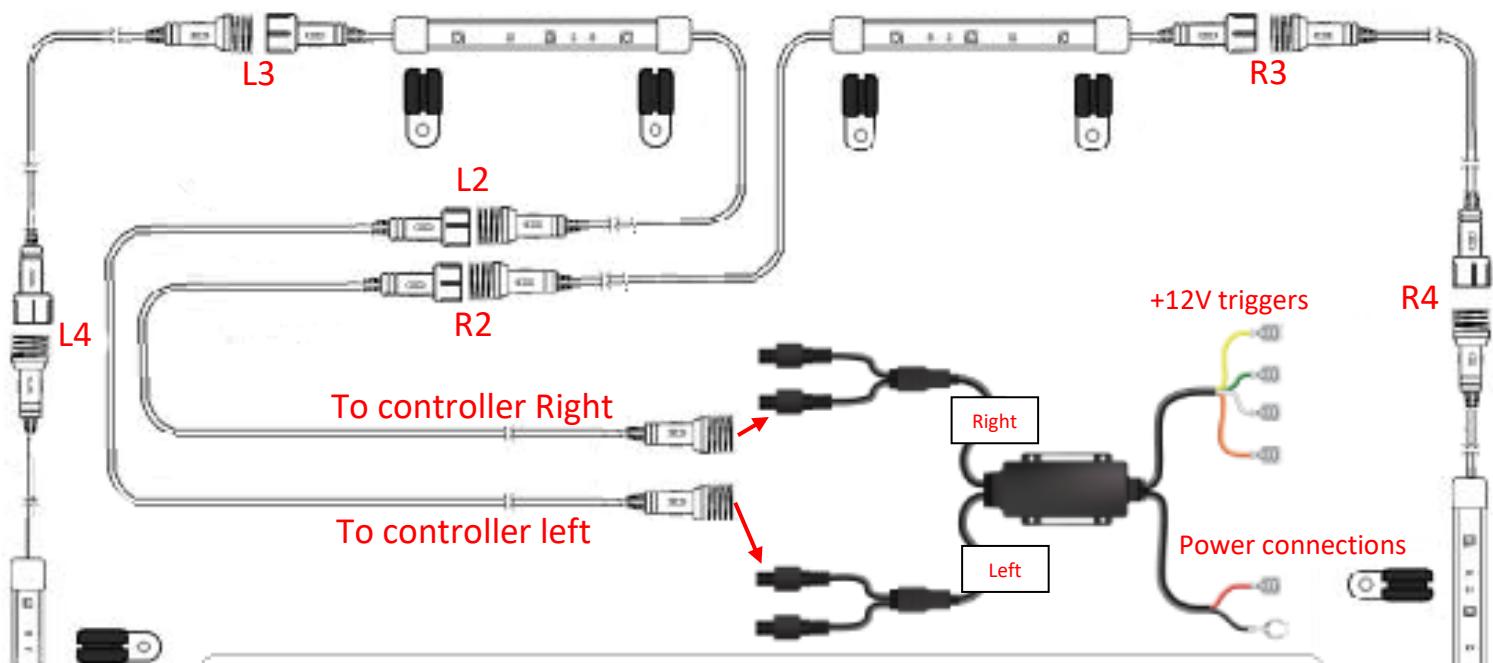


FRONT OF VEHICLE


Installation Instructions



Review the vehicle and locate suitable places to mount the six LED tubes. Avoid locations that are hot, move, pinch points, the gas tank, and gas lines.

- 1) Side tubes get 4 clamps, front and rear tubes get 2 clamps. Try to evenly space the clamps, and do not position the clamp directly over an LED.
- 2) Starting at the controller connect the left extension (driver side) and route to the front left tube. **orientating the tube as shown.**
- 3) Mount the tube with supplies hardware, and secure the cable every 12 inches with the included zip-ties.

- 4) Continue to connect the tubes and extensions, matching the flag labels, and mounting the tubes as you go.
- 5) Repeat the process for the right circuit (passenger side).
- 6) **Connect controller**
 Red: Switched +12v
 Black: Chassis Ground
 Green: Driver turn signal (+12v)
 Yellow: Passenger turn signal (+12v)
 White: Brake wire (+12v)
 Orange: Reverse / Puddle light (+12v)
- 7) Download app. Test functionality with remote and app. Test turn signals and brake functions.



CONTROLLER APP
SCAN QR CODE TO DOWNLOAD
HEISE CONNECT

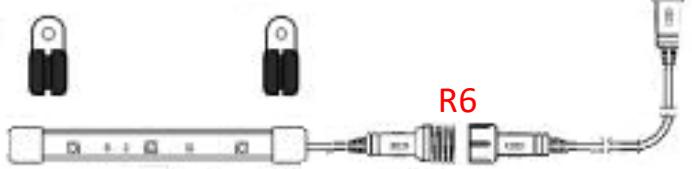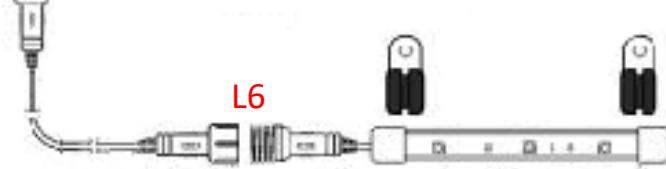

REAR OF VEHICLE