

Fits Jeep Wrangler (JL) 2018-2025, Fits Jeep Gladiator 2020-2025

Visit [MetraOnline.com](https://www.MetraOnline.com) for more detailed information about the product and up-to-date vehicle specific applications

KIT FEATURES

- Driver and passenger specific dash replacement sealed speaker pods to install 6" to 6.75" speaker
- Mounting positions for Chrysler three hole mount used by specific speaker manufacturers such as Alpine
- Sealed enclosure with a hole for the factory wiring grommet
- Includes speaker harness - 12"

KIT COMPONENTS

- A) Speaker pods (L&R) • B) Speaker harness adapter (2)

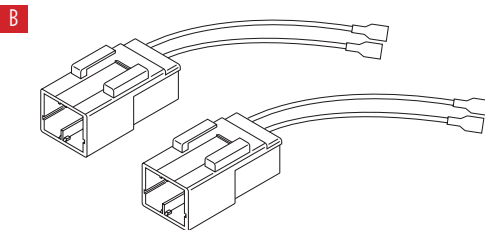
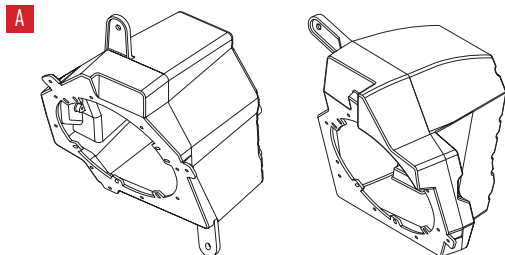


TABLE OF CONTENTS

Dash Disassembly	
2018-2023	2-6
2024-2025	7-11
Kit Assembly	12

TOOLS REQUIRED


- Panel removal tool • Phillips screwdriver
- 8mm, 10mm, socket wrench

Attention! Let the vehicle sit with the key out of the ignition for a few minutes before removing the factory radio. When testing the aftermarket equipment, ensure that all factory equipment is connected before cycling the key to ignition.


DASH DISASSEMBLY

Jeep Wrangler (JL) 2018-2023, Jeep Gladiator 2020-2023


1. Unclip and remove the panel below the steering column. Remove (2) Phillips screw exposed. (Figures A,B)
2. Unclip, unplug, and remove the climate control panel. (Figure C)

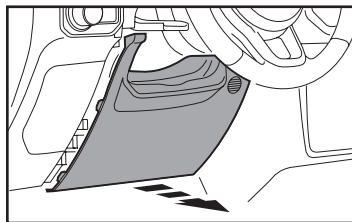

(Figure A)

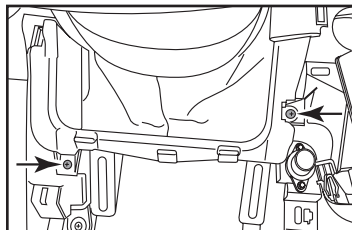


(Figure B)

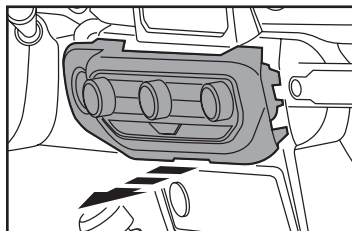


(Figure C)

3. Remove (2) Phillips screws securing the radio trim panel, then unclip and remove. (Figure D)
4. Remove (1) Phillips screw securing the dash pad, then unclip and remove. (Figure E)

Continued on the next page

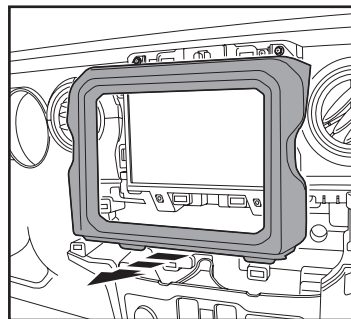


(Figure D)

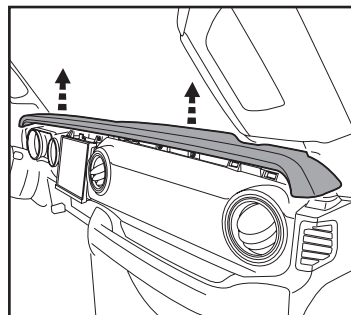


(Figure E)

DASH DISASSEMBLY (CONT.)


5. Remove (8) Phillips screws securing the instrument panel on the left side, and airbag panel on the right side. (Figure F, G)
6. Unclip the steering column shroud then set aside. (Figure H)

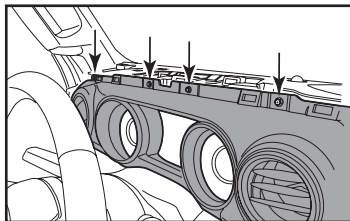

(Figure F)

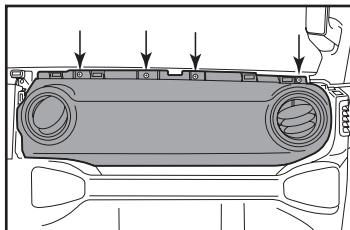

(Figure G)

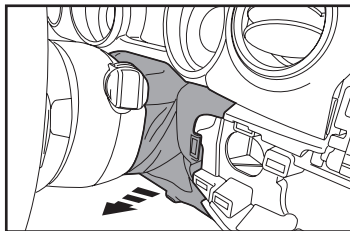


(Figure H)


Driver's side speaker removal:

7. Open the driver's door, then unclip and remove the panel on the side of the dash. Remove (5) Phillips screws exposed. (Figure I)
8. Remove (5) Phillips screws securing the speaker panel, then unclip and remove. (Figure J)

Continued on the next page

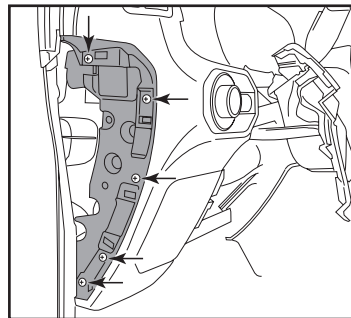


(Figure I)

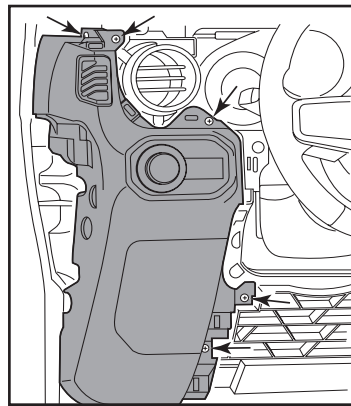


(Figure J)

DASH DISASSEMBLY (CONT.)

9. Remove (4) 10mm screws and (1) 8mm screw securing the dashboard brace. The brace only needs loosened to aid in removing the speaker pod in the next step. (Figure K, L)



(Figure K)




(Figure L)


10. Remove (3) Phillips screws securing the speaker pod, then unclip, unplug, and remove. Gentle aggression will be required to remove the pod. (Figure M)

Note: There is an electronic module attached to the back of the pod which must be removed and reused in Kit Assembly. (Figure N)

Continued on the next page

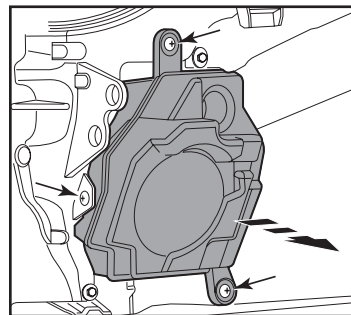

(Figure M)

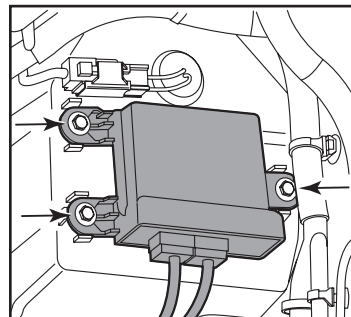


(Figure N)


DASH DISASSEMBLY (CONT.)

Passenger side speaker removal:

11. Open the passenger door, then unclip and remove the panel on the side of the dash. Remove (5) Phillips screws exposed. (Figure O)
12. Starting from the right side, unclip and remove the trim panel from the grab-bar. Remove (2) 10mm screws securing the grab-bar, then remove. (Figure P)




(Figure O)




(Figure P)

13. Unclip and remove the airbag trim panel, then remove (2) Phillips screws exposed. (Figure Q)
14. Open the glovebox, then unclip the hinge and drop the glovebox. Remove (3) Phillips screws exposed. (Figure R)

Continued on the next page

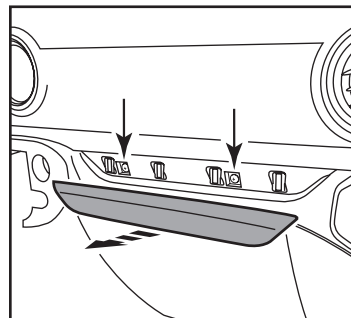


(Figure Q)

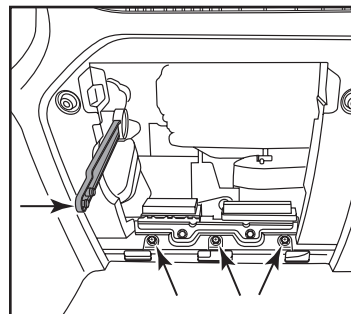


(Figure R)

DASH DISASSEMBLY (CONT.)

15. Looking in the glovebox cavity up high, remove (2) 13mm screws securing the back of the passenger side airbag. (Figure S))
16. Unclip and slightly release the airbag panel, just enough to expose (3) Phillips screws securing the passenger side dash panel. Remove the (3) screws. (Figures T, U)




(Figure S)




(Figure T)

17. Carefully unclip and pull out on the dashboard panel just enough to expose the speaker pod. Remove (3) Phillips screws securing the pod, then unclip, unplug and remove. (Figure V)

Continue to Kit Assembly

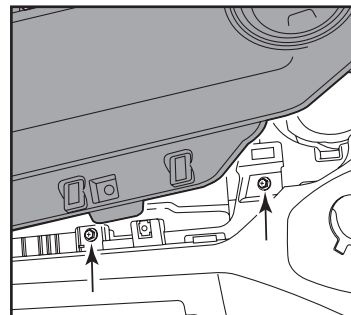

(Figure U)

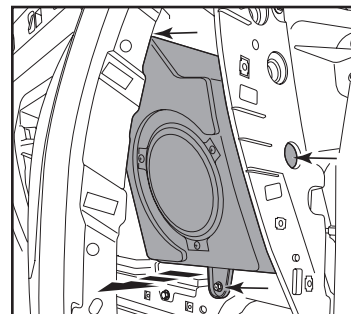


(Figure V)


DASH DISASSEMBLY

Jeep Wrangler (JL) 2024-2025, Jeep Gladiator 2024-2025


1. Remove the rubber tray liners from the trays in the dash panel above the radio to expose (4) Phillips screws. (Figure A)
2. Remove (4) Phillips screws from the tray above the radio. (Figure B)
3. Remove the tray above the radio, disconnect harness if present, remove the (2) Phillips screws exposed. (Figures C, D)

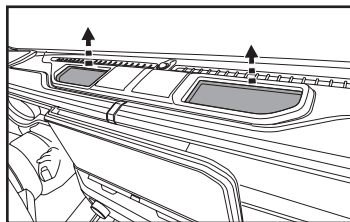

(Figure A)

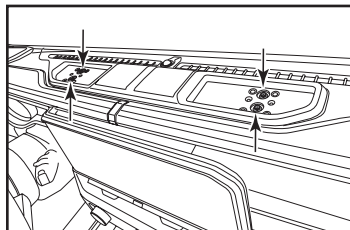


(Figure B)

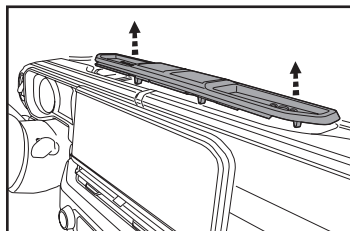


(Figure C)

4. Using a panel tool, remove the top trim piece. (Figure D)
5. With the top trim removed, remove the (2) Phillips screws at the base of the passenger A-pillar (Figure E)

Continued on the next page

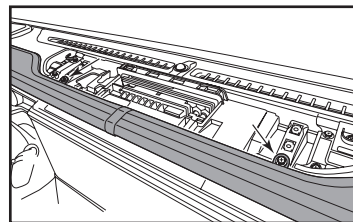


(Figure D)

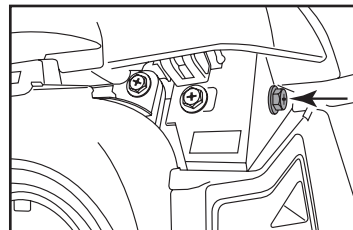


(Figure E)

DASH DISASSEMBLY (CONT.)


6. Remove the cover on the inside of the passenger grab handle. Remove the (3) phillips screws behind the handle. (Figures F, G)
7. Using a panel tool, remove the trim panel from the start button to the A/C controls and over to the passenger handle. Unplug the start button and A/C controls. (Figure H)

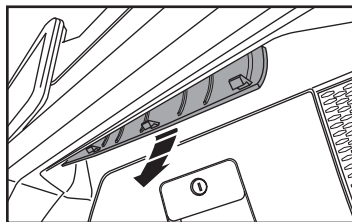

(Figure F)

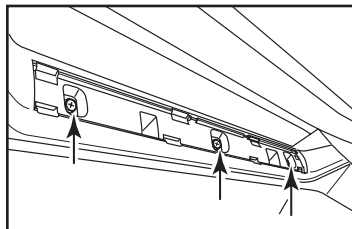


(Figure G)

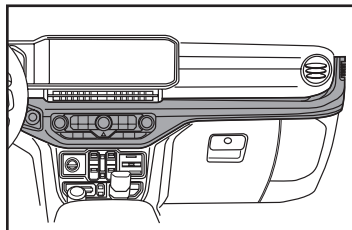


(Figure H)

8. Remove the (1) Phillips screw and (2) 8mm bolts on the remaining handle assembly. (Figure I)
9. Remove the (5) Phillips screws along the top of the radio screen and over the instrument cluster. (Figure J)
10. Using a panel tool, pry the clips holding the radio in place. Unplug the (2) harnesses from the radio.

Continued on the next page

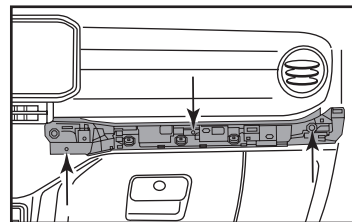

(Figure I)

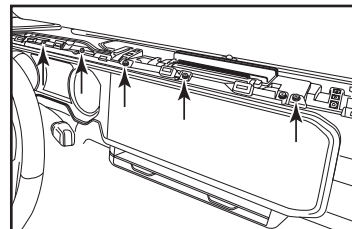


(Figure J)


DASH DISASSEMBLY (CONT.)

Driver side disassembly:

1. Remove the lower dash below the steering column. (Figure A)
2. Using a panel tool, remove the end cap. (Figure B)




(Figure A)




(Figure B)

3. Remove the (8) Phillips screws from the panel. (Figure C)
 4. Remove the trim from the top of the steering column to expose (2) phillips screws to the right of the headlight switch. (Figure D)
 5. Remove (1) phillips screw that is behind the headlight panel.
 6. The upper headlight switch panel will separate from the lower grille assembly.
 7. Remove the lower dash panel
- Continued on the next page*



(Figure C)




(Figure D)


DASH DISASSEMBLY (CONT.)

Driver side disassembly: (cont.)

8. Remove (4) 10mm screws and (1) 8mm screw securing the dashboard brace. The brace only needs loosened to aid in removing the speaker pod in the next step. (Figure E, F)



(Figure E)




(Figure F)


9. Remove (3) Phillips screws securing the speaker pod, then unclip, unplug, and remove. Gentle aggression will be required to remove the pod. (Figure G)

Note: There is an electronic module attached to the back of the pod which must be removed and reused in Kit Assembly. (Figure H)

Continued on the next page

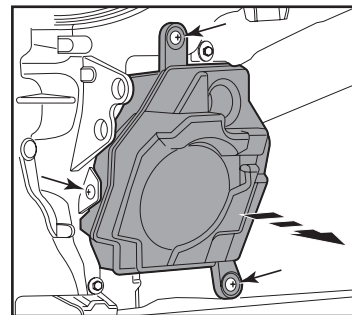

(Figure G)

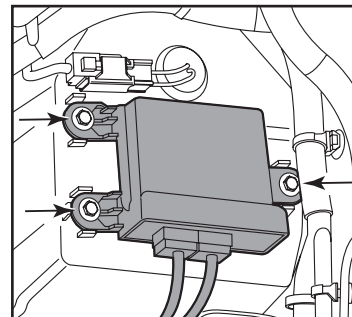


(Figure H)


DASH DISASSEMBLY (CONT.)

Passenger side disassembly:

1. Remove the side panel. (Figure I)
2. Open the glove box. Disconnect the glove box damper. Push up on the glove box stop, and then rotate the glove box downward and remove. (Figure J)




(Figure I)




(Figure J)

3. Remove (2) phillips screws below the glove box and (4) phillips screws under the side panel. (Figure K)
4. With all screws removed, pull on the panel to release the clips.
5. Remove the (3) phillips screws to remove the pod. (Figure L)

Continue to Kit Assembly

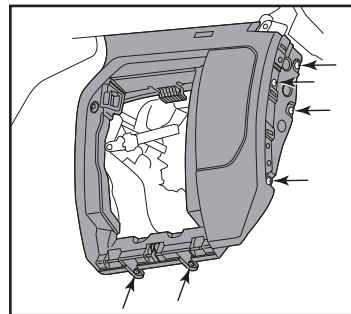


(Figure K)

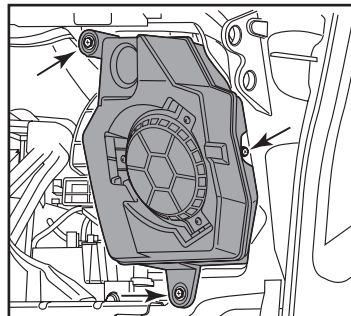


(Figure L)

KIT ASSEMBLY

1. Remove the factory speakers from the speaker pods. (Figure A)
2. Remove the grommet and factory wiring from the speaker pods. (Figure B)

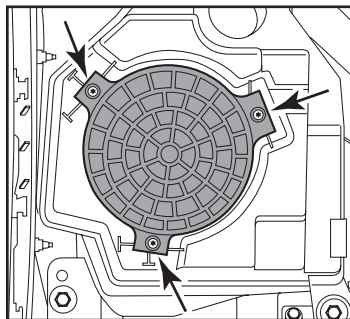


(Figure A)

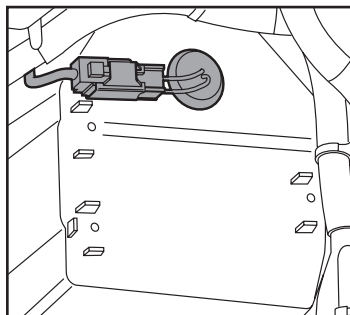


(Figure B)

3. Insert the grommets into the **JP-1014 speaker pods**. (Figure C)
4. Attach the **speaker harnesses** provided to the factory harness inside the pods, and then to the aftermarket speaker. (Figure D)
5. Secure the aftermarket speakers to the pods using hardware supplied with the speakers.
6. Reassemble the dash in reverse order of disassembly. Ensure that the factory electronic module removed in Dash Disassembly, step 10 (2018-2023), or step 9 (2024-2025) is connected back to the vehicle.

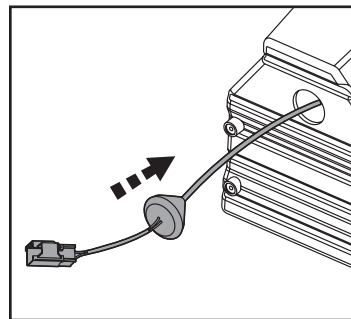

(Figure C)

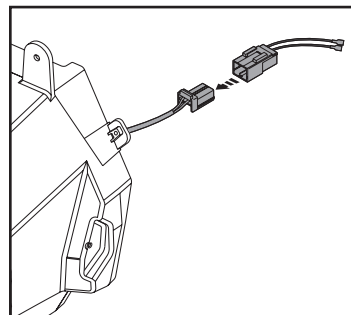

(Figure D)

[illegible][illegible]

[illegible][illegible]



JP-1014

INSTALLATION INSTRUCTIONS



Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP
certified technicians**