RGB1-UNDGLED

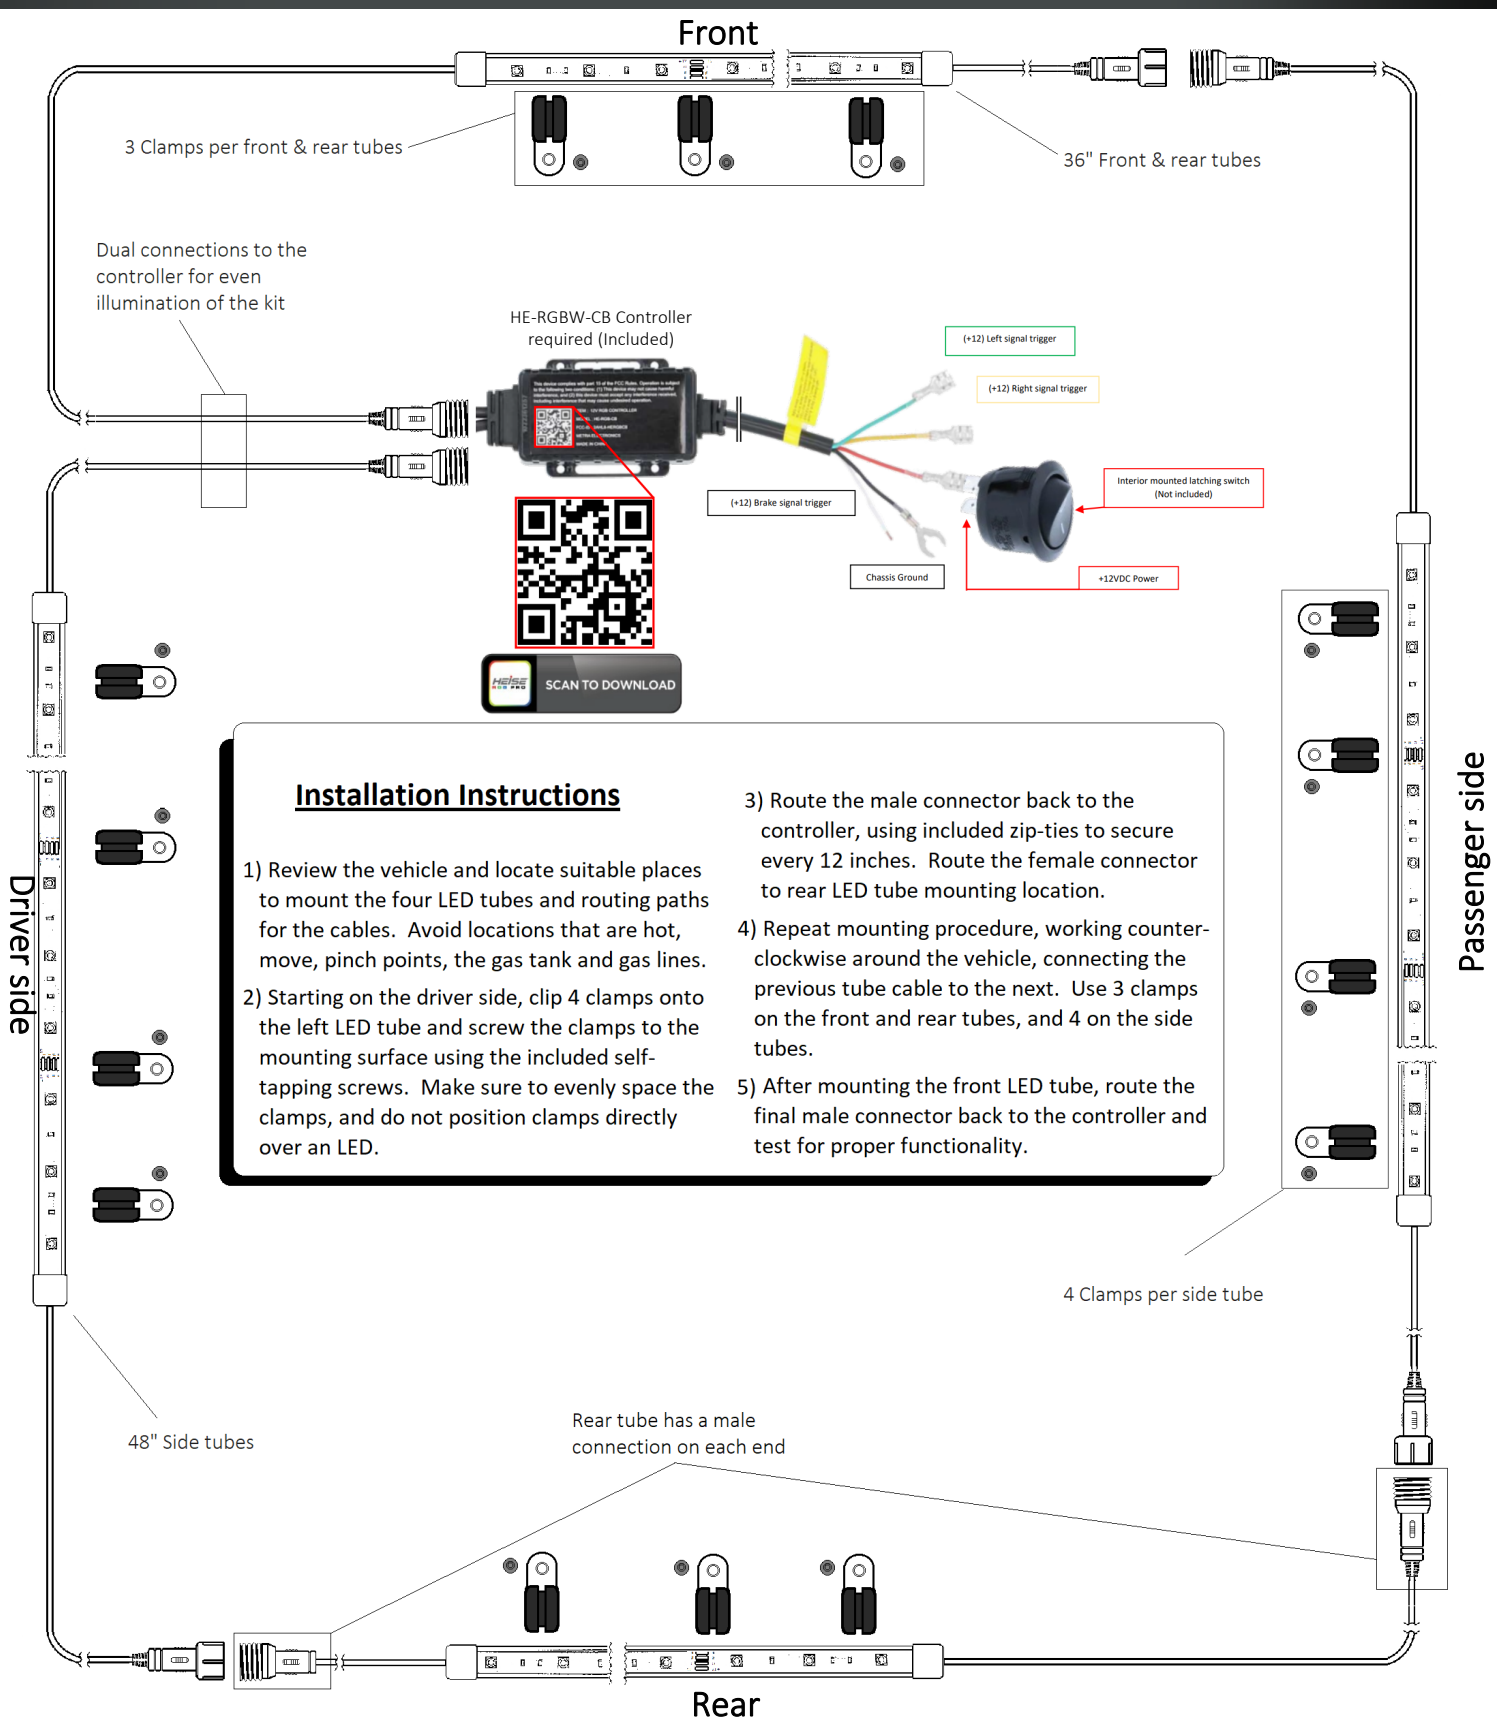

Installation Instructions

1) Review the vehicle and locate suitable places to mount the four LED tubes and routing paths for the cables. Avoid locations that are hot, move, pinch points, the gas tank and gas lines.
2) Starting on the driver side, clip 4 clamps onto the left LED tube and screw the clamps to the mounting surface using the included self-tapping screws. Make sure to evenly space the clamps, and do not position clamps directly over an LED.
3) Route the male connector back to the controller, using included zip-ties to secure every 12 inches. Route the female connector to rear LED tube mounting location.
4) Repeat mounting procedure, working counter-clockwise around the vehicle, connecting the previous tube cable to the next. Use 3 clamps on the front and rear tubes, and 4 on the side tubes.
5) After mounting the front LED tube, route the final male connector back to the controller and test for proper functionality.