

GM C/K Pickup 1988-2002 Tailgate Handle Trim Camera

Visit iBEAMUSA.com for more detailed information about the product and up-to-date vehicle specific applications.



Product Features

- Add a reverse camera by replacing the tailgate handle trim
- Resolution: 480 TV lines
- Field of view: Diagonal 186°, Horizontal 150°, Vertical 112°
- IP69
- Selectable parking lines

Part Components

A) Camera/tailgate handle trim B) Harness

A



B



TABLE OF CONTENTS

Wiring	2
Mirror operation	3
Specifications	4

TOOLS REQUIRED

- Wire stripper
- Tape
- Digital Multi-meter

Attention! When testing the aftermarket equipment, ensure that all factory equipment is connected before cycling the key to ignition.

WIRING

1. Run the wire in the vehicle.
 - Connect the **BLACK** wire to chassis ground
 - Connect the **RED** wire to 12V accessory or reverse depending on the desired function of the camera.
2. Connect the **YELLOW** RCA to the video input of the monitor. If using as a reverse camera, RCA may need to be connected to the back-up camera RCA on the monitor.

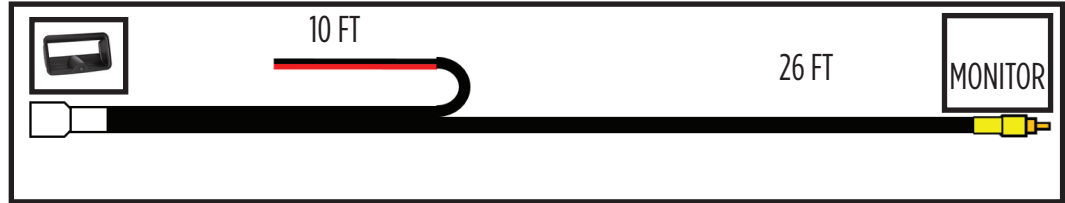


Figure A

SPECIFICATIONS

Resolution	640 X 480
Field of view	Diagonal 186°, Horizontal 150°, Vertical 112°
TV System	NTSC
Min. Illumination	0.1 Lux
Working Voltage	9 - 32V
Storage Temp.	-20° ~ 70 °C
Working Temp.	-40° ~ 85 °C
IP rating	IP69



TE-GMPU
INSTALLATION INSTRUCTIONS
#iBEAMSAFETY



Having difficulties? We're here to help.



Contact our Tech Support line at:
386-257-1187



Or via email at:
techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 7:00 PM

Sunday: 10:00 AM - 4:00 PM



KNOWLEDGE IS POWER
Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



Metra Recommends MECP certified technicians