



THE INSTALLER'S CHOICE

JP-GRILLE1

Wrangler JL/JT Installation



1. Remove the (6) six plastic fasteners at the top of the grille under the hood.




2. Starting at one side of the grille, firmly pull out on the bottom edge to release it from the panel. Continue this process across the entire lower edge until grille is free.



3. Using a flat blade screw driver, remove the factory clips from the Jeep grille. Transfer to JP-GRILLE1, secured to post like factory.



4. Using supplied hardware, secure the upper grille mounting plate to the grille panel. On both sides of grille.

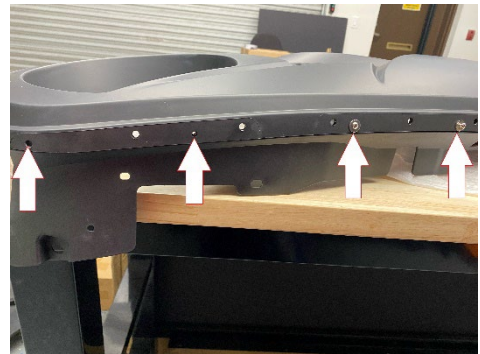

5. Install front grille in reverse order of removal, step 2 and then 1.

Rev:1 | Edit: 9/29/2021



www.MetraOnline.com

Tech Support
(386)257-1187