


Extra Flexible Speaker Cable With Tinned OFC conductor

Part No.	Jacket color	Length	Gauge	Strands(Construction)	O.D.
V10SW12125-BK	Matte black	125ft.	12 Ga.	98*3*0.12mm*2	5.0mm*2
V10SW12125-WB	Matte white/black	125ft.	12 Ga.	98*3*0.12mm*2	5.0mm*2
V10SW16250-BK	Matte black	250ft.	16 Ga.	37*3*0.12mm*2	3.5mm*2
V10SW16250-WB	Matte white/black	250ft.	16 Ga.	37*3*0.12mm*2	3.5mm*2
V10SW16500-BK	Matte black	500ft.	16 Ga.	37*3*0.12mm*2	3.5mm*2
V10SW16500-WB	Matte white/black	500ft.	16 Ga.	37*3*0.12mm*2	3.5mm*2

Ultra Flexible Matte Jacket

Multi-bundles Twist Construction

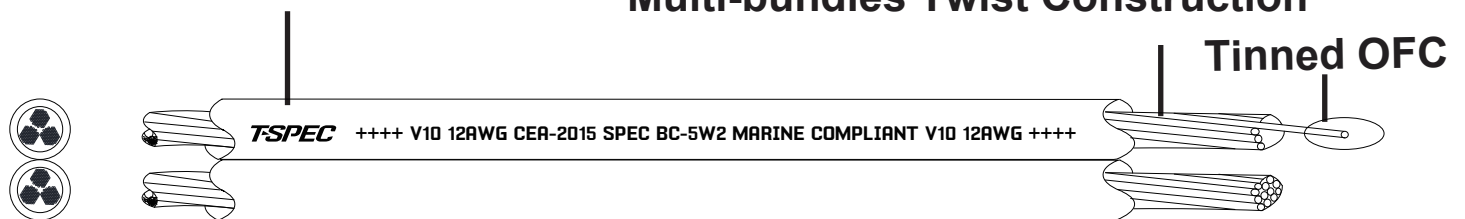

Specification:

V10 Series speaker wire is built for Ultimate sound quality and easy installation.

The cables come tinned oxygen free copper for excellent signal transfer and sonic accuracy;

With twisted pair configuration to reject system and engine noise. The Jacket with positive printwheel mark for easy installation.

It can be used as a subwoofer cable, coaxial speaker cable, motor lead, and power hook up cable.

Insulation:

This product offers a polyvinyl chloride compound and is moisture, abrasion, acid, diesel fuel and oil resistant.

It is extremely flexible and easy to work with.

The ambient Temperature:-40 °C to +75 °C