


Active Noise Canceling Bypass Harness Fits Select GM Models of Equinox/Terrain 2020

Visit AxxessInterfaces.com for more detailed information about the product and up-to-date vehicle specific applications

- Active noise canceling bypass harness
- Fits non-amplified GM vehicles with ANC audio systems, in a variety of RPOs
- Enhances sound quality during audio system upgrades
- Eliminates unwanted ANC interference for complete sound customization
- Protects vehicle electronics
- Always check vehicle warranty before altering the audio system to prevent voiding coverage

This **Active Noise Canceling Bypass Harness** is an OE module that helps reduce unwanted background noise. Microphones mounted throughout the vehicles are used to monitor sound levels and frequencies inside the vehicle's cabin. The factory ANC generates an inverted signal from the factory speakers to cancel out unwanted cabin noise.

It is recommended that the RPO code is double check to confirm application. The RPO Codes can be found on a placard labeled “**Service Parts Identification**” in the glove box, on the trunk floor or inside the driver’s door panel.

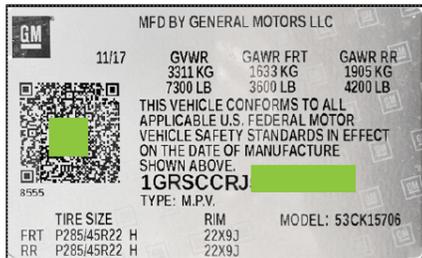

3GNAXKEV3 [REDACTED],2020,1XR26,02,20,X
 ,XKWTVB, AG1 AG6 AR9 AXP AY0 CNQ
 C4P DLF D31 EF7 FE9 FE9 FJW FWD GB8
 GNA GND H1T [UQA]20 J60 LYX MAH MNH
 NB5 NTB N52 RJA RSB SJF SPM TB4 UDD
 UZ6 U2K V8D WML ZP5 1LT 1LT 4AA 5CX
 6X1 7X1 8X2 9X2,384A,,,,

TABLE OF CONTENTS

ANC Plug Locations & Installation	
Equinox/Terrain.....	2
Bypassing ANC.....	3

KIT COMPONENTS

- ANC-GMH4 Wiring Harness

APPLICATIONS without amplifier/ with ANC

Make	Model	Year Range
Chevrolet	Equinox.....	2020
GM	Terrain.....	2020

NOTE: BOSE is the qualifier for each application listed above

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.

NOTE: Refer also to the instructions included with the aftermarket accessory before installing this device.

ANC PLUG LOCATIONS & INSTALLATION: GM EQUINOX, TERRAIN 2020

ACTIVE NOISE CANCELING (ANC) MICROPHONES

Without Amplifier/ With ANC

EQUINOX/TERRAIN 2020

RPO Codes: NKC+UZ6, IOU, IOS W/O IOB


Important Note: DO NOT PLUG the ANC bypass into any factory module other than the location mentioned below.

The ANC system operates when certain conditions are met:


- The amplifier has passed all self-diagnostic checks
- All doors are closed
- Battery voltage is between 9.5 V and 16 V
- The vehicle cabin temperature is less than 140°F (60°C)
- Engine speed is between 550 and 3000 RPM

To bypass the ANC remove the front right side of the center console. Pop off center console floor panel to gain access to the Amplifier/ANC module under center dash forward.

Simply unplug the OE connector from the AMP/ANC module and plug the T-harness inline. Your ANCs have been bypassed.

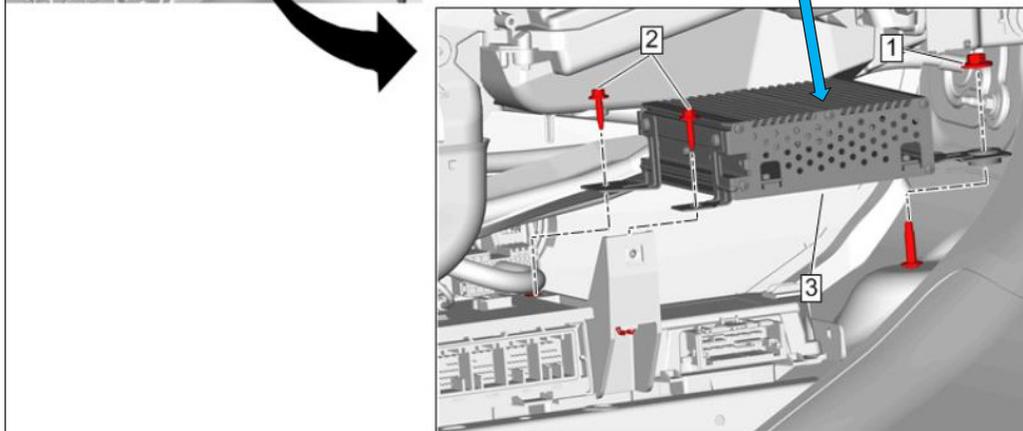

BYPASSING ACTIVE NOISE CANCELING

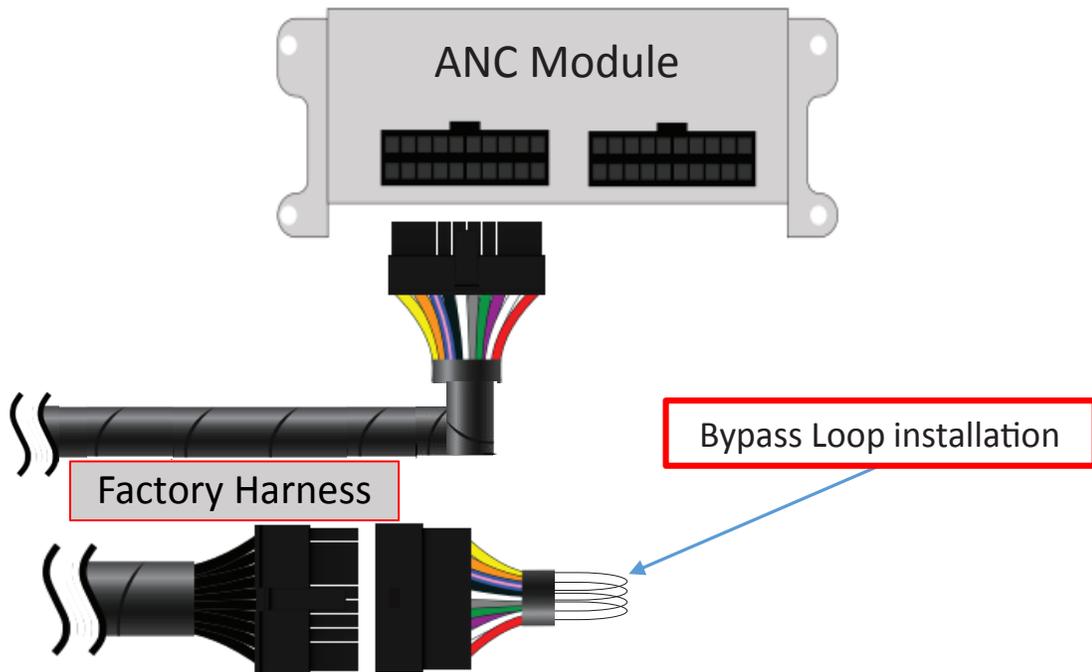



ANC-GMH4

INSTALLATION INSTRUCTIONS



Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP
certified technicians**