



INTERFACE COMPONENTS

- AXTO-MI2 interface
- AXTO-MI2 harness
- 16-pin harness with stripped leads and RCA jacks

APPLICATIONS

Mitsubishi

Lancer	2008-2013
Outlander.....	2007-2013

Data Interface with Data Signal Turn-On Fits Select Mitsubishi Models **2007-2013**

INTERFACE FEATURES

- Retains OEM Rockford Fosgate[®] system
- Provides NAV outputs (parking brake, reverse, mute, and speed sense)
- RCA level input
- Retains balance & fade
- USB updatable

For **Dash Disassembly Instructions**, scan QR Code or refer to Metraonline.com. Enter the year, make, and model of the vehicle in the **Vehicle Fit Guide** for **Radio Install kits**.

Metraonline.com



TABLE OF CONTENTS

Connections.....	2
Initializing and Adjusting the AXTO-MI2.....	3
QR Code for AXSWC	
Connections/Programming	3
AXSWC Wiring Guide	4

Visit MetraOnline.com for more detailed information about the product and up-to-date vehicle specific applications


TOOLS REQUIRED

- Cutting tool
- Crimping tool
- Tape
- Small flat-blade screwdriver
- Connectors (example: butt-connectors, bell caps, etc.)

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.


NOTE: Refer also to the instructions included with the aftermarket radio.

CONNECTIONS

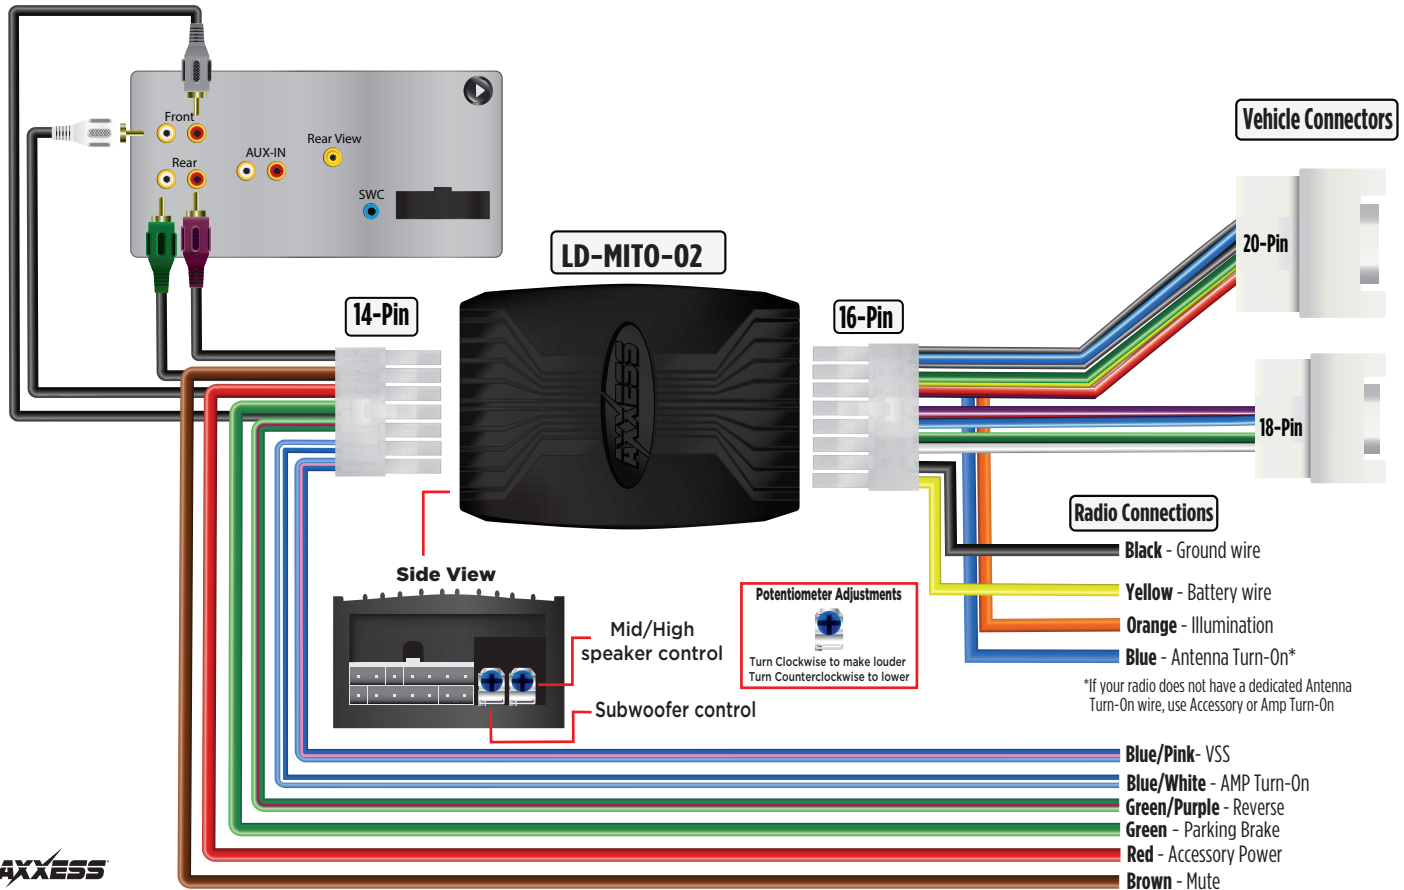

INITIALIZING AND ADJUSTING THE AXTO-MI2

- Initialize the interface by turning the ignition on for 30 seconds, then turn the ignition back off, and on again.
- If the speakers are too loud, or not loud enough, you can adjust the output by following the steps below:
 1. Locate the two potentiometers on the side of the interface, see image at right.
 2. Using a small flat-blade screwdriver, turn the gain knob clockwise to make it louder, or counterclockwise to make it lower.

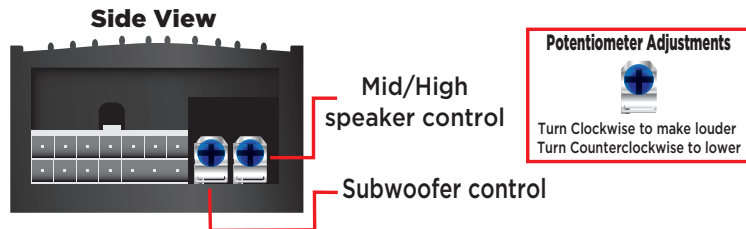

Scan QR Code for AXSWC
Connections/Programming



